


## BRAZIL — CABLE MOUNTED PLUGS & COUPLERS WITH SAFETY LOCK FEATURE

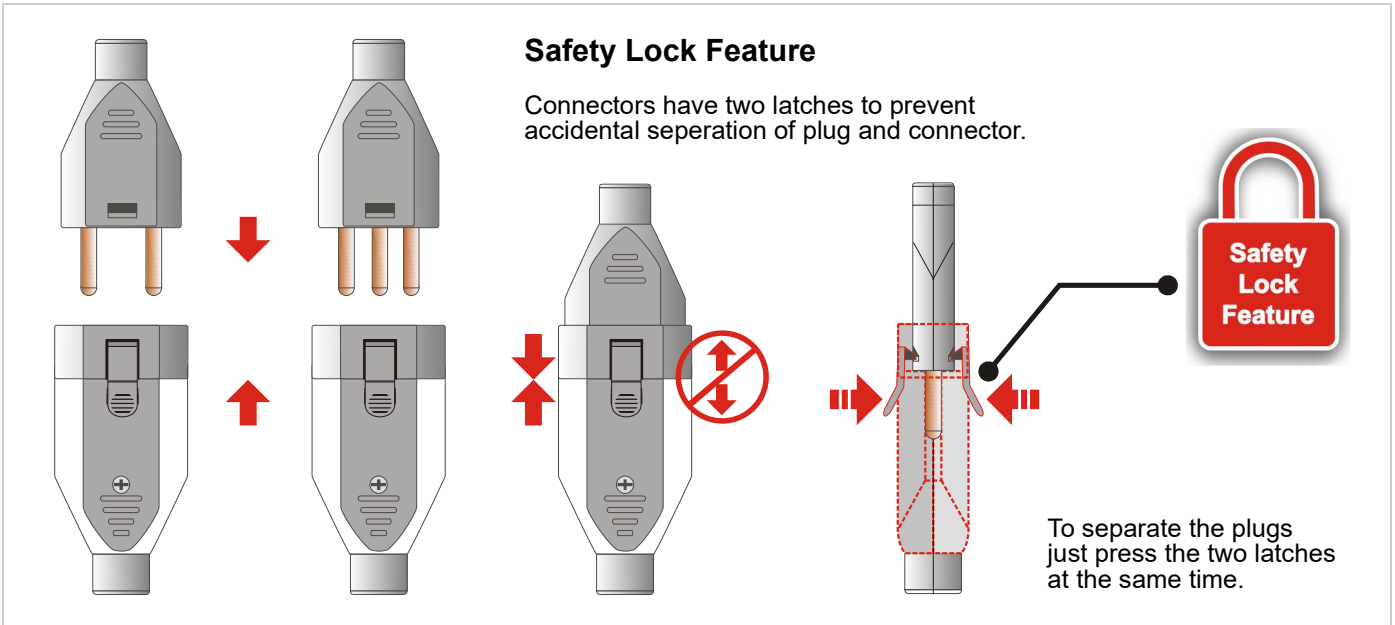

### 10 AMP AND 20 AMP POWER PLUGS AND CONNECTORS, REWIREABLE

- Connectors have two latches to prevent accidental separation of plug and connector.
- To separate the plugs just press the two latches at the same time.
- Products certified according to the standard.
- Compulsory certification, Compliance mark on products.

Description	Rated Current	Plug Light Grey	Plug Black	Connector Light Grey	Connector Black
2-pole 2-wire NON-Grounding (2POL)	10A	1419-LG	<b>2140-BK</b>	1417-LG	2144-BK
2-pole 2-wire NON-Grounding (2POL)	20A	1420-LG	<b>2141-BK</b>	1418-LG	2145-BK
2-pole 3-wire Grounding (2P+E)	10A	<b>1729-LG</b>	<b>2142-BK</b>	<b>1727-LG</b>	<b>2146-BK</b>
2-pole 3-wire Grounding (2P+E)	20A	<b>1730-LG</b>	<b>2143-BK</b>	<b>1728-LG</b>	<b>2147-BK</b>

Catalog numbers in bold indicates active products in this group. Contact our sales office for the others.

**Brazil standard NBR 14136**

The Class I and II plugs shapes are similar to the Europlug. Front profile is also a flat hexagon, but it is slightly thicker. Plug looks remarkably similar to the Swiss SEV 1011 plug, but the earth pin is further 5mm away from the center line. Both plugs are 35.5 mm wide. The 3-pin Class I plug is 17 mm high, whereas the 2-pin Class II plug is with only 14 mm slightly slimmer (the Europlug is only 0.3 mm smaller).

Compliance mark of certified products.

**Plug pins dimensions in millimetres**

**Pins View**

10A: Ø 4.0  
20A: Ø 4.8