

Non-Metallic Liquidtight Conduit, PolyTuff® II Tubing

Non-Metallic Liquidtight PolyTuff® II Tubing – Black



Specifications

- **Type/Series** PolyTuff® II Tubing
- **Trade Sizes** 1/4, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2 inches
- **Material** Tubing: Co-Extruded Rigid and Flexible PVC
- **Ratings** Voltage Rating Same as Wire Insulation Rating (300 Volt Maximum)
- **Temperature** Operating Temperature Range Environment 0°F to +140°F (-18°C to +60°C)
- **Certifications** UL Recognized (File E92035)
CSA Certified (File LL80365)



IP66
SUITABILITY

Conduit Catalog Number	Replaces Obsolete Cat. No.	Trade Size (Metric Designator)	Nominal Diameter inches (mm)		Nominal Bend Radius inches (mm)	Nominal Weight each Meter	Conduit VPE/Pack Meter (feet)	Conduit EDP No.	Nonmetallic Fittings, Black Matching Catalog Number	
			Inside	Outside					Straight	90° or Swivel
B2025	—	1/4" (10)	0.36" (9.3)	0.57" (14.5)	1.50" (38.1)	105 g (net)	30 m (100)	126294	F2025*	F20259*
B2038	6711	3/8" (12)	0.49" (12.6)	0.70" (17.8)	2.00" (50.8)	120 g (net)	30 m (100)	105751	P038NBKA	PS0389NBK
B2050	6712	1/2" (16)	0.63" (16.1)	0.83" (21.1)	2.00" (50.8)	135 g (net)	30 m (100)	105752	P050NBKA	PS0509NBK
B2075	6713	3/4" (21)	0.83" (21.1)	1.04" (26.4)	3.00" (76.2)	194 g (net)	30 m (100)	105753	P075NBKA	PS0759NBK
B2100	6714	1" (27)	1.05" (26.0)	1.30" (33.1)	3.00" (76.2)	284 g (net)	30 m (100)	105754	P100NBKA	PS1009NBK
B2125	6715	1 1/4" (35)	1.40" (35.4)	1.65" (41.8)	5.00" (127.0)	334 g (net)	30 m (100)	105755	P125NBK	P1259NBK
B2150	6716	1 1/2" (41)	1.59" (40.3)	1.88" (47.8)	5.00" (127.0)	522 g (net)	15 m (50)	105756	P150NBK	—
B2200	6718	2" (53)	2.03" (51.6)	2.36" (59.9)	5.00" (127.0)	686 g (net)	15 m (50)	105757	P200NBK	—

* NOT UL Recognized or CSA Certified.

Non-metallic Liquidtight Tubing

Product Features and Benefits

POLYTUFF® Liquidtight Conduit




Straight Liquid-Tight Connector

PolyTuff II Tubing – Black

- PVC core with corrugated walls bonded to PVC jacket.
- Handles twists, turns, bends, switchbacks and straightaways with ease.
- All nonmetallic construction ends fatigue and separation problems.
- Can be cut with a knife or PVC cutters.
- UL Recognized and CSA Certified.

SwivelLok® Multi-Position

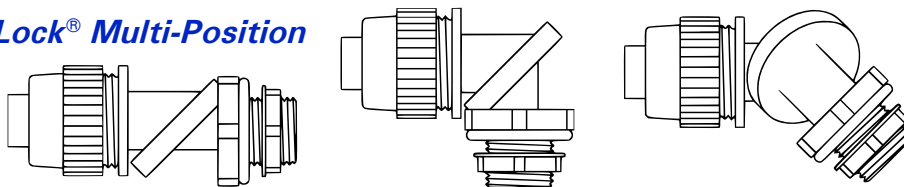

SwivelLok® Multi-Position (PS...NBK) Liquid-Tight Connector

Technical data and dimensions are subject to change without notice. Dimensions in inches (mm).