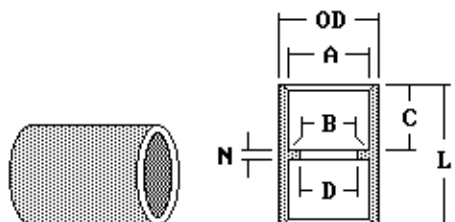


Kunststoffschutzrohr,  
Standard-KupplungenNEMA TC-2  
WC1094A

UL 651

RIGID  
NON-METALLIC CONDUIT,  
STANDARD COUPLINGSSunlight Resistant,  
Rated for use with  
90°C Conductors

Nominal	Cat.No.	A	B	D	OD	C	N	L	UPE/Packed
1/2	E940D	21.6	21.2	19.3	28.2	17.5	3.2	38.1	150
3/4	E940E	27.0	26.6	24.1	33.3	19.1	3.2	41.3	100
1	E940F	33.8	33.3	30.7	41.3	23.8	8.5	50.8	50
1 1/4	E940G	42.6	42.0	39.0	50.4	25.4	3.2	54.0	30
1 1/2	E940H	48.7	48.1	44.6	56.8	28.6	3.2	60.3	25
2	E940J	60.8	60.2	55.6	69.5	30.2	3.2	63.5	30

Weitere Größen auf Anfrage. Further nominal sizes on request.