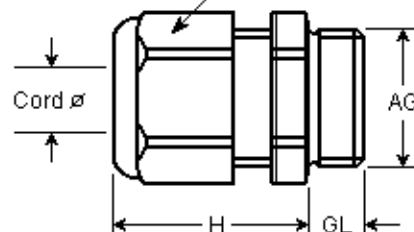


Dimensions = mm

SW-Schlüsselweite  
Across Flats

## CORD CONNECTORS

UL Listed or Recognized, CSA and VDE Approved

Cord Connector, Plastic (Material: PA UO according UL 94), IP 68 (with Sealing O-Ring at NPT thread), Locknut not included, Temperature range -40°C to +100°C Intermittent to +120°C (Dynamic -20°C to +80°C Intermittent to +100°C), Colors available: Black (RAL 9005), Gray (RAL 7035), Blue (RAL 5012 for "i"-Area), Further versions for other cord diameters and NPT Sizes (1, 1/4, 1/2) available.

Catalog No.	Color	AG (NPT)	Cord ø	GL	H	SW	Wght/ea	UPE/Pack	EDP-No
3228	Black	3/8"	2 - 6	15	22	22/19	10g	500/50	100672
3229	Gray	3/8"	2 - 6	15	22	22/19	10g	500/50	100673
3231	Black	1/2"	6 - 12	13	27	24	12g	500/50	100674
3232	Gray	1/2"	6 - 12	13	27	24	12g	500/50	100675
3234	Black	3/4"	9 - 16	13	30	33	15g	500/50	100676
3235	Gray	3/4"	9 - 16	13	30	33	15g	500/50	100677