


Dimensions = mm

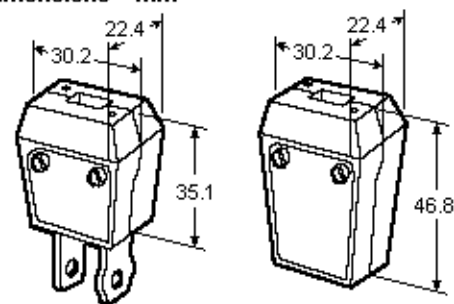

Kabel  $\varnothing$  / Cord Dia max. 6.4mm

Stecker und Kupplungen mit innen-  
liegender Zugentlastung, Kunststoff,  
2-polig ohne Erde (Schutzleiter)

Flachkabel ca. 1.31mm<sup>2</sup>-0.519mm<sup>2</sup>  
Flat Cable AWG 16-20

Plugs and Connectors with Build-In  
Strain Relief, Plastic Cover,  
2-Pole 2-Wire Non-Grounding

Cat.No.	NEMA	Vac	Amp	ANSI	Description	Color	Wght/ea	UPE/Pack	EDP-No
101-E*	1-15P	125	15	C73.10	Standard Plug,	Black	18g	100/10	100020
101-W*	1-15P	125	15	C73.10	NON-Polarized	White	18g	100/10	100023
101-WP*	1-15P	125	15	C73.10	Plug, Polarized	White	19g	100/10	100024
102-E*	1-15R	125	15	C73.10	Kupplung/Connector	Black	26g	100/10	100028

\* Check availability, if current stock is depleted item will be discontinued.