


G-Sicherungseinsätze, Keramik  
Dimensions (32x6.3)mm (1 1/4x1/4)"

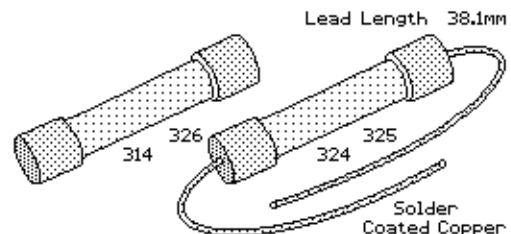

Cat.No 314/324 flink / Fast Acting  
Cat.No 325/326 träge / Time Delay

UL 198G CSA# C22.2

3AB ELECTRONIC FUSES  
Ceramic Tube Fuse Link

# 314/324 CSA .125-15A

# 325/326 CSA .250-10A

UPE/Packed 100

Cat.No's	VAC	(Zusatz) Nennstrom Amp					(Suffix) Rated Current Amp				
		.125	.250	.375	.500	.750	001.	002.	003.	004.	005.
314#	250	.125	.250	.375	.500	.750	001.	002.	003.	004.	005.
324#	250	006.	007.	008.	010.	012.	015.	020.			
	125	025.	030.								
326#	250	.250	.300	.375	.400	.500	.600	.700	.750	.800	001.
325#	250	01.2	1.25	01.5	01.6	002.	02.5	02.8	003.	03.2	004.
	250	005.	6.25	007.	008.	010.	012.	015.	020.		
	125	025.	030.								