


G-Sicherungseinsätze, Glasrohr
 Dimensions (20x5)mm (0.79x0.2)"

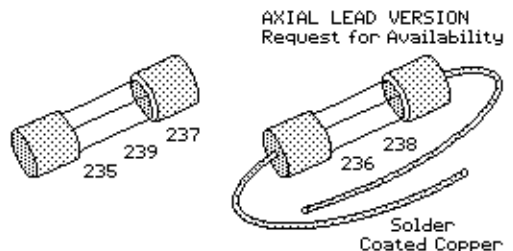

Cat.No 235/236 flink / Fast Acting
 Cat.No 238/239 träge / Time Delay

UL 198G CSA C22.2

5x20 ELECTRONIC FUSES
 Glass Tube Fuse Link

Cat.No 237 mittelträge
 Medium Time Delay

UPE/Packed 1000

Cat.No's	VAC	(Zusatz) Nennstrom Amp					(Suffix) Rated Current Amp				
		.100	.125	.200	.250	.300	.400	.500	.600	.700	.800
235■	250	.100	.125	.200	.250	.300	.400	.500	.600	.700	.800
236■	250	001.	1.25	01.6	002.	02.5	003.				
	125	004.	005.	006.							
239■	250	.200	.250	.300	.400	.500	.600	.700	.750	*125V AC	
238■	250	.800	001.	1.25	01.6	002.	02.5	003.		004.*	
237■	125	001.	1.25	01.6	002.	02.5	003.	004.	005.		