
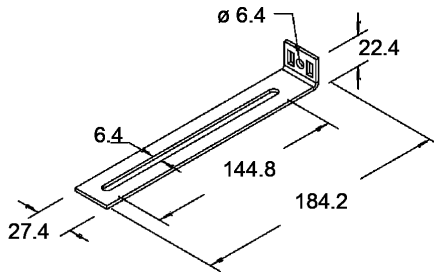


## Dimensional Informations

Catalog No.	Switch	Vac	Hz	Amps	Outlet	Dims. (LxWxH) mm
ALF 16D12R	Door	115	60	0.16	Yes	312.4 x 116.6 x 35.1
ALF 16D18R	Door	115	60	0.35	Yes	459.7 x 116.6 x 35.1
ALF 25D18R	Door	230	50	0.30	No	459.7 x 133.4 x 46.7
ALF 16D24R	Door	115	60	0.35	Yes	612.1 x 116.6 x 35.1
ALF 16M12R	Manual	115	60	0.16	Yes	312.4 x 116.6 x 35.1
ALF 16M18R	Manual	115	60	0.35	Yes	459.7 x 116.6 x 35.1
ALF 25M18R	Manual	230	50	0.30	No	459.7 x 133.4 x 46.7
ALF 16M24R	Manual	115	60	0.35	Yes	612.1 x 116.6 x 35.1
ALF 16M48R	Manual	115	60	0.65	Yes	1219.2 x 133.4 x 46.7
ALF 16M18RC*	Manual	115	60	0.35	Yes	459.7 x 116.6 x 35.1

\* Corded light with 6 feet (1.83m) power cord is listed to UL/cUL 153 standard.

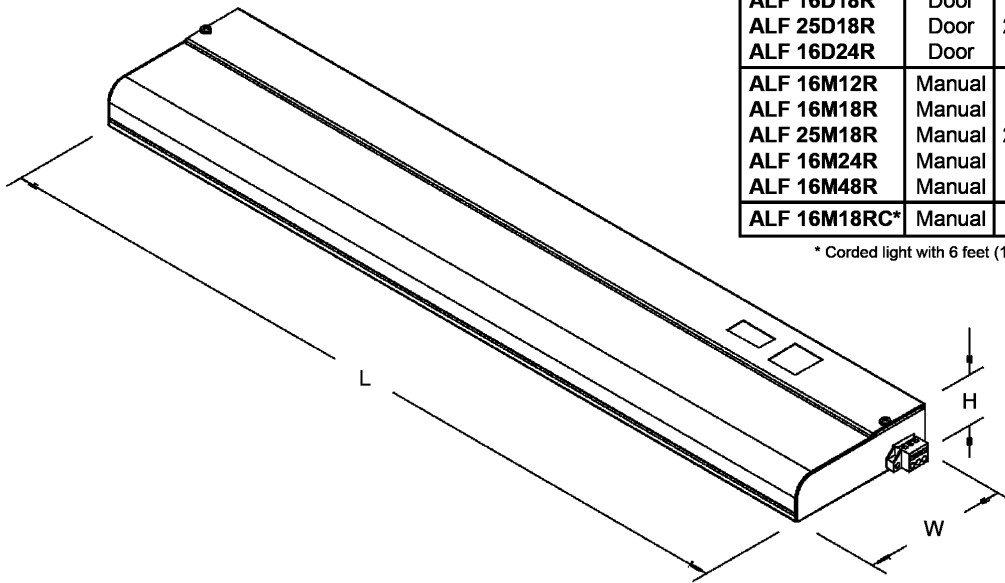


Catalog No.	Description
PDL FBRKT	Mounting Bracket Kit


### Mounting Bracket Kit for Fluorescent Light Package

Kit simplifies mounting light package in PROLINE® disconnect enclosures. Includes brackets, all mounting hardware, and complete instructions.

### Manual Switch

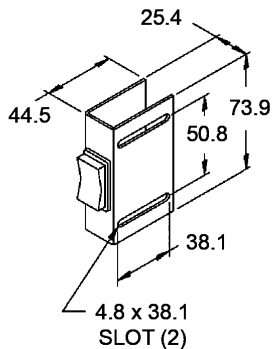

### Door-Activated Switch

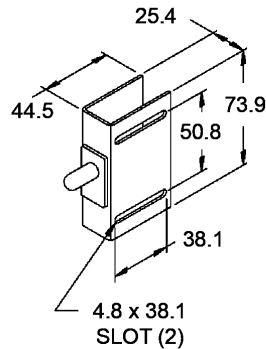

Catalog No.	Description
ALF FSWM	Manual Switch
ALF FSWD	Door-Activated Switch

### Remote Switches for Fluorescent Light Package

Remote switches for ALF-Series light packages.