

USA / Canada - Miniature Lamp Strips, MS Series

Miniature Lamp Strips

MS104, MS106, MS108, MS115, MS215

Features

- Miniature (1) light strip for applications where mounting space is restrictive.
- This product utilizes low wattage T5 or T8 pre-heat lamps.
- Product is shipped fully assembled.
- Fixture can be mounted individually or in continuous rows for surface mounting.
- Applications include display cases and covers.



Construction

- Channel is die-formed from 21-gauge steel.
- Cover is die-formed from 24-gauge steel.
- Electrical connections are made inside the wire way.
- Keyhole shaped mounting holes and standard wiring knockouts are included.

Finish

- Housing is finished in lighting grade white baked gloss enamel paint.

Lamping (*Lamps not included, order separately*)

- For use with T5 and T8 fluorescent linear lamps.

Diffuser

- No diffuser for this fixture.
- Fluorescent lamps are exposed.

Electrical

- This unit is wired with UL listed normal power factor pre-heat ballast with starter for 120V/60 Hz operation.


Certification

- All fixtures are c(UL)us listed for damp locations.

Options (*Please contact our sales office*)

- Asymmetric reflectors available.

Catalog No.	Reflector	(No. of Lamps) Type	Dimensions L x W x D in Inches (mm)			Mounting M
MS104	MSR4	(1) F4T5	9" (228.6)	1-3/8" (34.9)	2-1/4" (57.2)	7" (177.8)
MS106	MSR6	(1) F6T5	12" (304.8)	1-3/8" (34.9)	2-1/4" (57.2)	10" (254.0)
MS108	MSR8	(1) F8T5	15" (381.0)	1-3/8" (34.9)	2-1/4" (57.2)	13" (330.2)
MS115	MSR15	(1) F15T8	21" (533.4)	1-3/8" (34.9)	2-1/4" (57.2)	19" (482.6)
MS215	MSR215	(2) F15T8 (Tandem)	40-5/8" (1031.9)	1-3/8" (34.9)	2-1/4" (57.2)	38-1/2" (977.9)

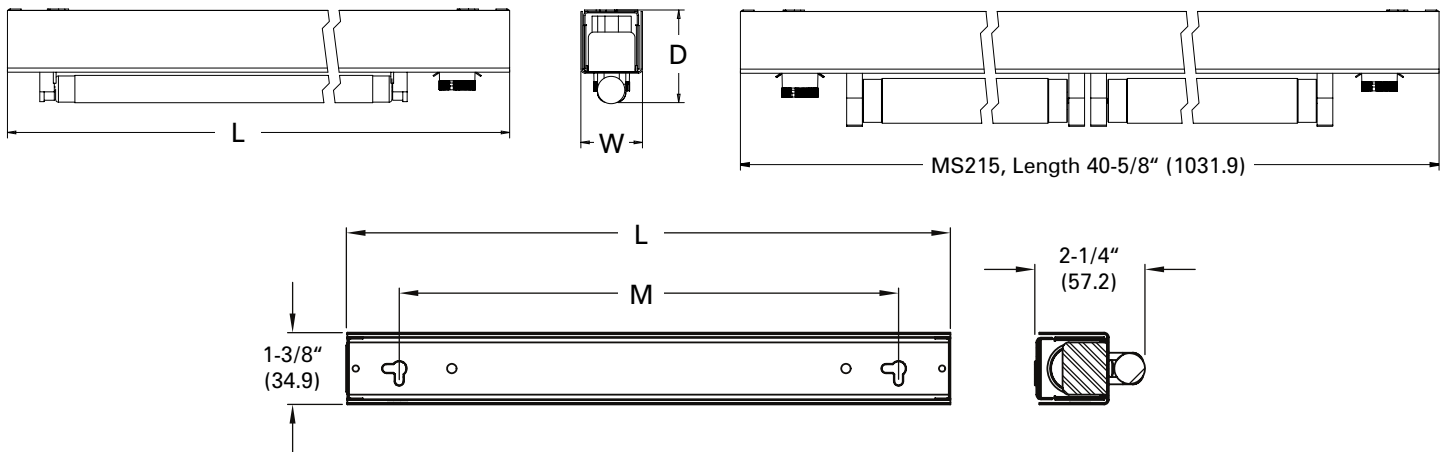

Specifications and dimensions subject to change without notice. Dimensions in Inches (mm).