



Cat. No's indicates products of different manufacturers available.

0 - 60 Amp

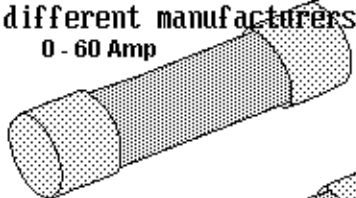

70 - 600 Amp

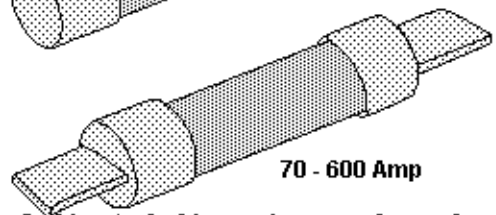

Indicated dimensions only refer to first catalog number listed.

UL 198C CSA ■ HRCI-J

600 V AC

Fast-Acting
UL Class J flink

Interrupting rating
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current					UPE Packed	Dimensions = mm			
	1 - 60 Amp.						A	B	C	
JLS ■	1	2*	3	4*	5*	6	10	57.2	20.6	---
	10	15	20	25	30					
JKS ■										
A4J ■	35	40	45	50	60	10	60.3	27.0	---	
CJS ■										
JCL ■	* = Not available from all manufacturers.									
	Intermediate Amp. Sizes & up to 600A upon Request									