


Cat. No's indicates products of different manufacturers available.

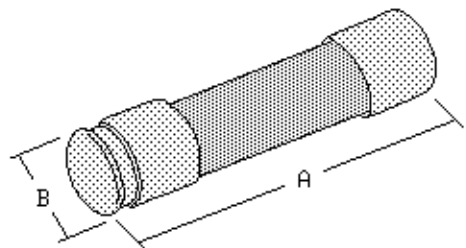

Indicated dimensions only refer to first catalog number listed.

UL 198E CSA ■ HRCI-R

600 V AC

Fast Acting
UL Class RK1 flink

Interrupting rating AC
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 1 - 60 Amp.						UPE Packed	Dimensions = mm		
	1	2	3	4	5	6		A	B	C
KLSR ■ KTSR ■ AGK-R ■	8	10	12	15	20	25	10	127.0	20.6	---
	30									
CTSR ■ SCLR ■	35	40	45	50	60		10	139.7	27.0	---

NOTE: Further Sizes upon Request