


UL

125V, 60°C

Dimensions

= mm

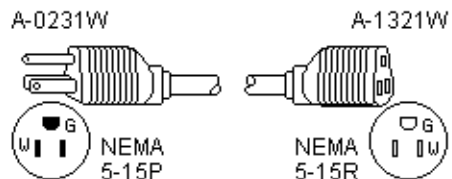

Verlängerungsleitung, ungeschirmt,
Stecker gerade, Kupplung gerade,
2-polig plus Erde

Power Extension Cord, Unshielded,
Straight Plug, Straight Connector,
2-Pole 3-Wire Grounding

SJ = Gummi-Isolation

SJ = Rubber Insulation

Catalog No.	Wire	AWG	mm ²	No x Ø	CU kg/km	O.D. Ø	Length	Color	Amp	UPE
633	SJ	16/3	3x1.31	26x0.254	BC 36	8.9	3.0m	Black	13	25
640	SJ	16/3	3x1.31	26x0.254	BC 36	8.9	4.6m	Black	13	10