


UL CSA

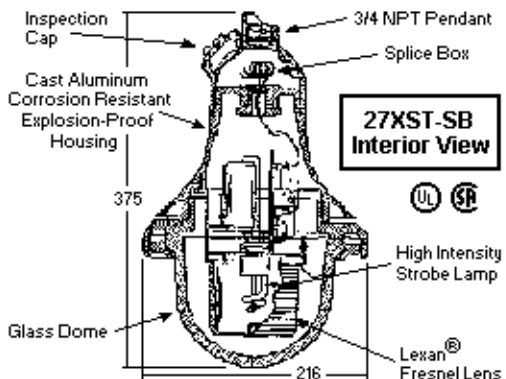

Dimensions

= mm

Description: Model 27XST Series B explosion proof strobe light provides 78 high-intensity flashes per minute. This warning light operates on 24Vdc, 120Vac, 240Vac, 50/60Hz. The Model 27XST Series B is UL listed for Class I, Division 1, Groups C and D, Class I, Division 2, Groups A, B, C and D, Class II, Division 1 & 2, Groups E, F, and G. In addition, it is CSA approved.

Applications: This warning light is especially designed for explosion proof atmospheres where a visual signal is needed. Ideal for use in areas such as: oil rigs, grain elevators, mines, and refineries. The 27XST Series B can be used for plant evacuation or any other communication needs.

**Designed for use in
Explosion-Proof Atmospheres**

Catalog No./Color (*)	Description	NOTE:
27XST024-xxx	Pendant Mount 24Vdc, 1.25 Amps.	Dome Guard Model (DXG) is available upon Request!
27XST120-xxx	Pendant Mount 120Vac 50/60Hz, 0.3Amp.	
27XST240-xxx	Pendant Mount 240Vac 50/60Hz, 0.15Amp.	
27XST024-xxx-CMX	Ceiling Mount 24Vdc, 1.25 Amps.	Lens available in three colors.
27XST120-xxx-CMX	Ceiling Mount 120Vac 50/60Hz, 0.3Amp.	
27XST240-xxx-CMX	Ceiling Mount 240Vac 50/60Hz, 0.15Amp.	
8550 C 095-01 (BSC)	Replacement Lens, Lexan, Blue	Style/Lamp: Strobe Tube Lamp Life: 2,000 Hours Operating Temperature: -37°C to 40°C UL listed Indoor/Outdoor CSA approved
8550 C 095-02 (ASC)	Replacement Lens, Lexan, Amber	
8550 C 095-03 (RSC)	Replacement Lens, Lexan, Red	
8422 A 420	Replacement Strobe Tube	
8436107-03	Replacement Mechanisms/24Vdc	
8436107-02	Replacement Mechanisms/120Vac	
8436107-01	Replacement Mechanisms/240Vac	
8444250-01	Replacement Dome, Glass	