



5-15P



5-20P



6-15P



6-20P




U.S.A.



Canada



Mexico



515PV





515CV

UL

CSA

Dimensions = mm

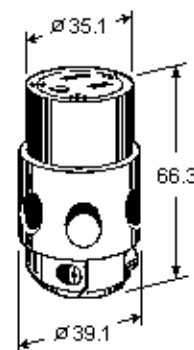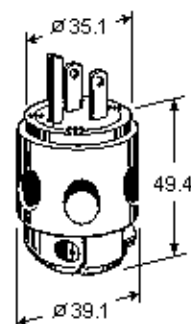

Kabel Ø (6.22-16.64)mm

Cord Dia. (0.245-0.655)"

Stecker und Kupplungen mit  
versenkter Zugentlastung

Plugs and Connectors with Clamp Seats  
Flush

Cat No's: xxxxU = Kunststoff / PVC (gelb/Yellow)  
xxxxR = Gummi / Rubber (schwarz/Black)

Catalog No.	NEMA	Vac	Amp	ANSI	Beschreibung/Description		Color	UPE/Pack
515PV	5-15P	125	15	C73.11	Stecker	Plug	Yellow	50
515CV	5-15R	125	15	C73.11	Kupplung	Connector	Yellow	10
515PR	5-15P	125	15	C73.11	Stecker	Plug	Black	50
515CR	5-15R	125	15	C73.11	Kupplung	Connector	Black	10