


105°C 600V
 VW-1 (UL)
 CSA FT1

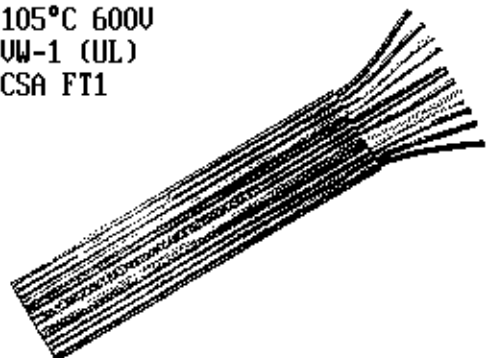

Shielded Versions with Black Jacket
 available on 16 and 14 AWG
 Request for more Information

UL/CSA Appr. Flat Festoon Power and Control Cable, Oil-Resistant, PVC Jacket, Stranded Bare Copper Conductor PVC Color Coded and Numbered Insulation, 600V, Temperature Range -55°C to +105°C, Indoor and Outdoor Use, UV-Resistant

Cat# Black	Cat# Yellow	No./AWG	Stranding	Dimensions(mm)	Wght/km
811258	811268	4 x 16	65 x 34 AWG	5.1 x 15.1	149 kg
811261	811234	8 x 16	65 x 34 AWG	5.1 x 28.2	268 kg
811262	811232	12 x 16	65 x 34 AWG	5.1 x 40.8	402 kg
811259	811269	4 x 14	41 x 30 AWG	5.3 x 15.9	179 kg
811263	811233	8 x 14	41 x 30 AWG	5.3 x 29.9	328 kg
811267	811272	12 x 14	41 x 30 AWG	5.3 x 43.2	507 kg
811264	811235	4 x 12	65 x 30 AWG	5.8 x 18.0	238 kg
811277	811278	5 x 12	65 x 30 AWG	5.8 x 22.0	313 kg
811273	811236	8 x 12	65 x 30 AWG	5.8 x 34.0	477 kg
811266	811237	4 x 10	105 x 30 AWG	6.9 x 22.4	358 kg
811270	811238	4 x 8	168 x 30 AWG	9.3 x 30.2	626 kg
811271	811239	4 x 6	266 x 30 AWG	10.9 x 36.8	894 kg
811275	811276	5 x 6	266 x 30 AWG	10.9 x 44.1	1192 kg
811279	811280	4 x 4	420 x 30 AWG	12.5 x 42.9	1118 kg
811274	811240	4 x 2	665 x 30 AWG	15.0 x 49.7	1892 kg