




U.S.A. Canada



U.S.A.

NOM


Mexico

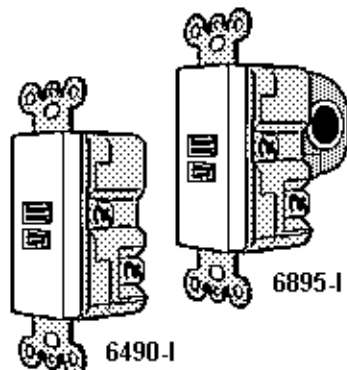

6490-I

6895-I

Dimensions = mm

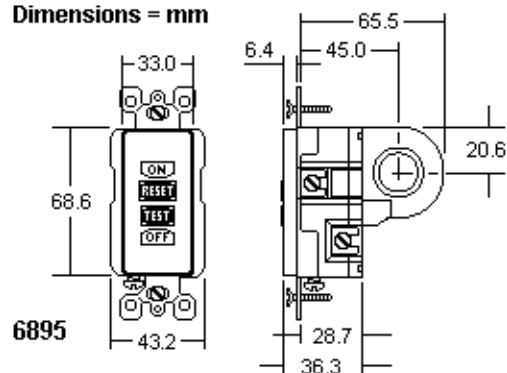

Switch-Rated GFCI Catalog No. 6490
Back and Side Wired, 20A 125V Switch-
Rated feed-trough; Switch Rating 1.5 HP
at 120V, no indicator light.

Note: The 6895 is wired in conjunction
with a switching contactor or relay
supplied by the customer. Each 6895 and
contactor combination MUST be reviewed
and approved by UL. Please request for
list of combinations approved to date.

HIGH CURRENT GFCI Cat. No. 6895
Adds ground fault protection to
heavy equipment powered through
3- and 4-wire circuits grounded
with neutral. Contact rating at
GFCI: 20A 125V; load capability
with 125V control relay 50A at
240V max. Test and Reset buttons
confirm proper operation Ideal
for use with spas, heater packs,
high pressure washers, industrial
mixers and other equipment.

Catalog No.	Color	Description	Approvals	Wght/ea	UPE/Pack	EDP-No
6490-I	Ivory	Switch-Rated GFCI	UL, CSA, NOM	109g	10	111561
6895-I	Ivory	High Current GFCI	UL(UR), NOM	134g	10	107453

Supplied without Wallplate. Colors Brown, White & Black available on request.