


UL CSA ■  
Base, General  
Purpose Phenolic, 150°C, Class R  
Holders Have Been Tested and Approved  
for 200,000 Amp Interrupting Capacity,  
Holders Used with Fuses (Ø 20.6 x 127.0)mm

Note: Copper Box Connectors are available  
on 30 and 60 amp fuse holders only!

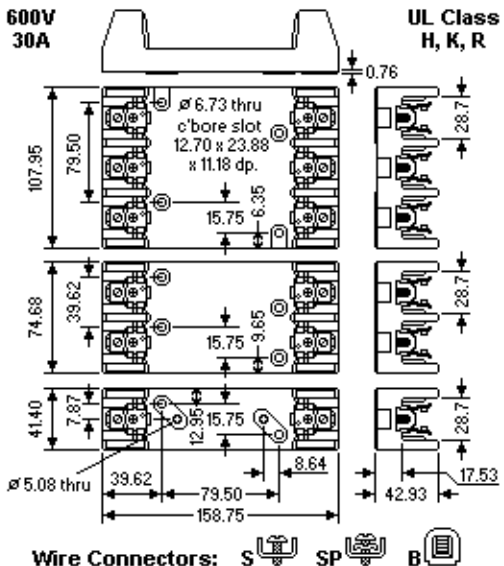

No.of Poles	Cat.No. Standard	Class H + K Reinforced	Cat.No. Class R	Wire Connector	Copper Wire Range (AWG)	UPE Packed
1	6F30A1BCU ■	R6F30A1BCU ■	6R30A1BCU ■	Copper Box	6 - 14	50
2	6F30A2BCU ■	R6F30A2BCU ■	6R30A2BCU ■	Copper Box	6 - 14	25
3	6F30A3BCU ■	R6F30A3BCU ■	6R30A3BCU ■	Copper Box	6 - 14	20