





Dimensions  
refer to  
Class H  
Holders

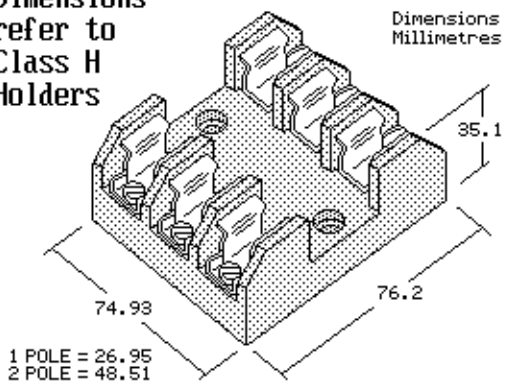

UL            CSA■  
250V AC 0-30A

Class R Holders  
Tested & Approved  
for 200.000 Amp.  
Interrupt.Capacity

Wire Connectors: S  SP  B 

FUSE HOLDERS, suitable for Class H, K and R\* Fuses (\*or use Class R Holders)

- Base, High Impact Thermoplastic, 125°C
- Patented Cool Clip(R) Design
- Clip, Copper Alloy, Tin Plated

Fuse Size:  
(Ø 14.3 x 50.8)mm

Note: Copper Box Connectors are available  
on 30 and 60 amp fuse holders only!

No.of Poles	Catalog Numbers		Class R only	Wire Connector	Copper Wire Range (AWG)	UPE Packed
	Standard	Reinforced				
1	F30A1BCU■	RF30A1BCU■	R30A1BCU■	Copper Box	6 - 14	50
2	F30A2BCU■	RF30A2BCU■	R30A2BCU■	Copper Box	6 - 14	25
3	F30A3BCU■	RF30A3BCU■	R30A3BCU■	Copper Box	6 - 14	20