


UL Listed - Standard 514A
CSA Certified - C22.2 No. 18

Single-Gang Boxes
Die Cast Aluminum
50.8mm Deep, with Lugs,
Three Threaded Outlets,
114.3mm x 69.9mm

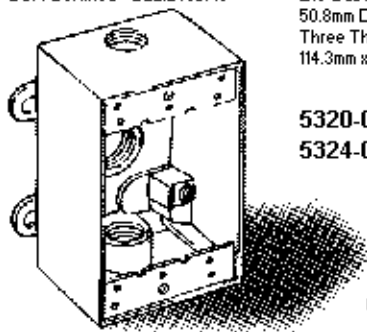

5320-0 to 5320-3
5324-0 and 5324-3

Product Features:

- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package

General Dimensions available on Request

For use in branch circuit wiring in wet, damp or dry locations
May be used as a weatherproof junction box, or as housing for receptacles, switches, and GFCI's

Catalog-Number	Color	Outlets	Pkg. Type	Gramm/1	EDP-No	UPE/Packed
5320-0	Gray	3 x 1/2"	Shrink	285	101285	20
5320-1	White	3 x 1/2"	Shrink	285	107096	20
5320-2	Bronze	3 x 1/2"	Shrink	285	107097	20
5320-3	Green	3 x 1/2"	Shrink	285	107099	20
5320-5	Gray	3 x 1/2"	Carded	300	107100	6
5320-6	White	3 x 1/2"	Carded	300	107101	6
5320-7	Bronze	3 x 1/2"	Carded	300	107103	6
5324-0	Gray	3 x 3/4"	Shrink	280	107104	20
5324-3	Green	3 x 3/4"	Shrink	280	107105	20
5324-5	Gray	3 x 3/4"	Carded	295	107106	6