


UL Listed - Standard 514A  
 CSA Certified - C22.2 No. 18

Single-Gang Boxes  
 Die Cast Aluminum  
 50.8mm Deep, with Lugs,  
 Five Threaded Outlets,  
 114.3mm x 69.9mm



5322-0 and 5331-0

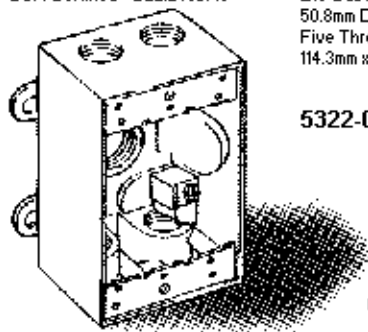

#### Product Features:

- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package

*General Dimensions available on Request*

For use in branch circuit wiring in wet, damp or dry locations  
 May be used as a weatherproof junction box, or as housing for receptacles, switches, and GFCI's

Catalog-Number	Color	Outlets	Pkg. Type	Gramm/1	EDP-No	UPE/Packed
5322-0	Gray	5 x 1/2"	Shrink	300	105365	20
5331-0	Gray	5 x 3/4"	Shrink	285	107118	20