




Dimensions = mm



423-3

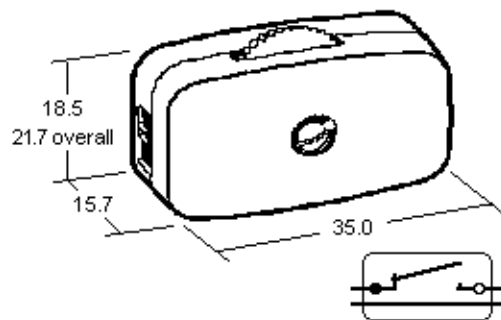

Miniature Feed-Through Cord Switches
6A/125V, 3A/125VT, 3A/250V

UL Listed (File #E-7458)
CSA Certified (File #LR-3413)
NOM Certified (#057)

Miniature Single Pole, ON-OFF Sequence,
Captive Screw. For use with wire type
SPT-1 AWG 18/2 conductors.

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: -40°C to 120°C

Catalog No.	Color	Description	Wght/ea	UPE/Pack	EDP-No
423-3W	White	Mini Feed-Through Cord Switch	8g	100/10	117475
423-3	Brown	Mini Feed-Through Cord Switch	8g	100/10	117473
423-3I	Ivory	Mini Feed-Through Cord Switch	8g	100/10	117474