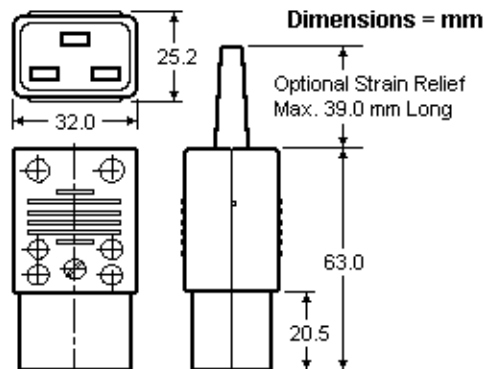


104U BK

Screw
Terminals

Rewirable Cord Connector
for Cordage up to 14/3 AWG,
Class I Equipment,
2-Pole 3-Wire Grounding

Gerätesteckdose für Leitungsmontage
für Leitungstypen bis 3x AWG 14,
Schutzklasse I, 2-polig + Erde

Please Order Optional
PVC Strain Relief Separately
(Dimensions available upon Request)

UL Standard 817
CSA Standard 22.2

Ratings: 21 Amp. 250 Volt AC

Recommended Strain Relief: HN14-43

Empfohlene Knickschutztülle: HN14-43

Catalog Number	Color RAL	Description	Wght/ea	UPE/Pack	EDP-No
104U-AAA0-A-B1	Black 9005	Appliance Cord Connector	33g	100	117555
104U-AAA0-B-B1	Grey 7001	Appliance Cord Connector	33g	100	117556
HN14-41A	Black	Strain Relief (Ø 8mm max.)	3g	100	102963
HN14-41B	Grey	Strain Relief (Ø 8mm max.)	3g	100	102964
HN14-43A	Black	Strain Relief (Ø10mm max.)	3g	100	102965
HN14-43B	Grey	Strain Relief (Ø10mm max.)	3g	100	102966