


## Thermoplastic Cord

## Type SVT

### Type SVT

60°C 300 Volt UL/CSA Portable Cord

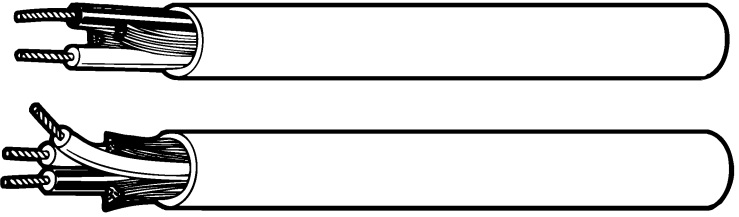

### APPLICATIONS

- Vacuum cleaners
- Food mixers
- Office equipment

### FEATURES

- Resists: Acids, Alkalies, Ozone

### CONSTRUCTION

#### Conductors:

- 18 AWG annealed stranded bare copper per ASTM B-174

#### Insulation:

- Premium-grade, color-coded PVC
- Color code:  
2C – Black, White  
3C – Black, White, Green

#### Jacket:

- Polyvinylchloride (PVC)
- Colors available:  
black, white, gray
- Temperature range:  
-20°C to +60°C
- Ribbed jacket

#### Jacket Marking:

- (SIZE) (mm<sup>2</sup>) 60°C SVT (UL)  
E# --- CSA LL# FT-2 RoHS  
MADE IN USA 300V

### INDUSTRY APPROVALS

- UL Listed
- CSA Certified
- RoHS Compliant

### PACKAGING

- Put-up 250 feet (76 m), carton qty. see table
- Other put-ups available on special order only

TYPE SVT — 300 VOLT — UL/CSA							
Catalog Number <sup>1</sup>	AWG Cond.	Cond. Strand	Nom. Insul. Thickness	Nominal Outside Dia.	Current Amps.*	kg/km Net. <sup>2</sup>	Carton Qty. <sup>3</sup>
<b>86002</b>	18/2	41/34	0.015" (0.38)	0.235" (5.97)	10	52.2	304m
<b>86003</b>	18/3	41/34	0.015" (0.38)	0.240" (6.10)	10	59.6	304m

\*Green conductor for grounding only. Ampacities based on NEC table 400.5(A).

<sup>1</sup> Catalog Number requires jacket color code suffix: **BLK** (black), **GRY** (gray), **WHT** (white)

<sup>2</sup> Actual shipping weight may vary.

<sup>3</sup> Standard carton quantity, put-up see packaging.



Dimensions in inches (mm).  
Technical data and dimensions are subject to change without notice.