




PLUG

CORD

CONNECTOR



LP-21
(CEE 7 Plug)

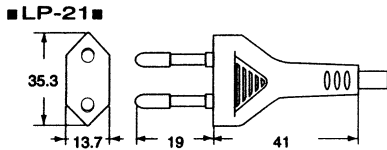


Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VVH2-F	2	0.75mm ² (42/0.15mm)	3.7x5.8	250V 2.5A


Standard: CEE 7 /
EN50075 / IEC 60320-1



LS-7
(IEC320.C7)

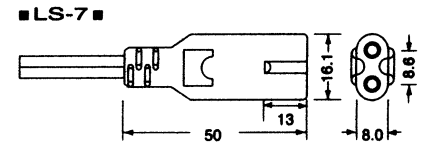

LP-21R
EMI Filter Plug (CEE 7)

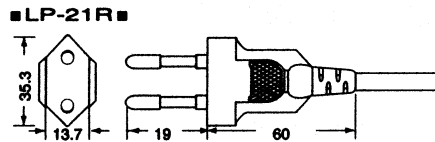

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VVH2-F	2	0.75mm ² (42/0.15mm)	3.7x5.8	250V 2.5A


Common Mode In 50 OHM System

	100 Mhz	120 Mhz	140 Mhz	160 Mhz	180 Mhz	200 Mhz
L = 500µH	40 dB	26 dB	20 dB	17 dB	11 dB	5 dB

Standard: CEE 7 /
EN50075 / IEC 60320-1



LS-7
(IEC320.C7)

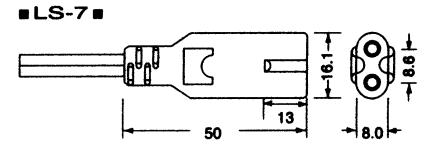

LP-33
Angle Type

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VV-F	3	0.75mm ² (24/0.2mm)	6.3	250V 2.5A



Standard: CEE 7 /
EN50075 / IEC 60320-1



LS-18
(IEC 320.C5)



LP-34A

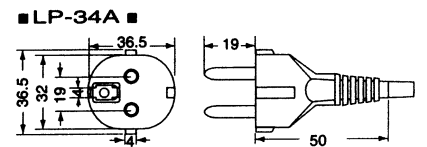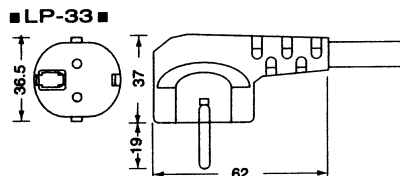



PLUG

CORD

CONNECTOR



LP-33
Angle Type



LP-34A

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VV-F	3	0.75mm ² (24/0.2mm)	6.3	250V 10-16A
H05VV-F	3	0.75mm ² (24/0.2mm)	7.2	250V 10-16A
H05VV-F	3	1.0mm ² (32/0.2mm)	7.5	250V 10-16A
P5SA (Foil-Aluminum Shielded)	3	1.0mm ² (24/0.2mm)	7.2	250V 10-16A VDE only
P5SC (Braid-Tinned Shielded)	3	0.75mm ² (24/0.2mm)	7.9	250V 10-16A VDE only







LS-60
(IEC320.C13)




LS-60L
(IE320.C13)

Standard: CEE 7 /
EN50075 / IEC 60320-1

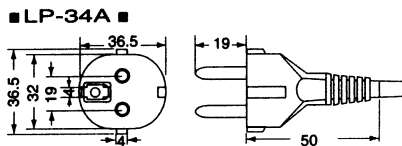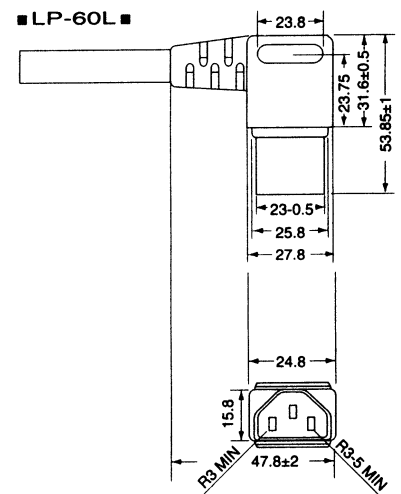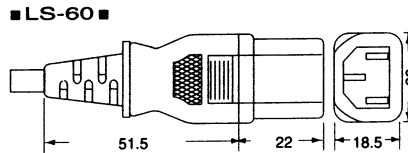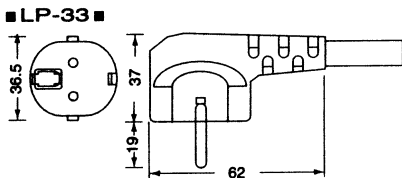

Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
1757		Europe Power Supply Cord Set, Germany/France/Belgium etc.				



LP-3901BK020	Power Supply Cord Set, Black, 2.0 m H05VV-F3G 0.75, 70 °C, 10-16A, 250V AC, Cord Ref. GFC-3R	202g	50	ea	107663
	1st End : Plug No. LP-34A (Double Earthing System)				
	2nd End : Connector No. LS-60				

Dimensional specification sheet available on request, please contact our office.



PLUG

CORD

CONNECTOR



LS-14
(IEC 60320-2.2)

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VV-F	3	0.75mm ² (24/0.2mm)	6.3	250V 10A
H05VV-F	3	0.75mm ² (24/0.2mm)	7.2	250V 10A
H05VV-F	3	1.0mm ² (32/0.2mm)	7.5	250V 10A
P5SC	3	0.75mm ² (24/0.2mm)	7.9	250V 13A UL CSA VDE
SJT H05VV-F	3	0.75mm ² (24/0.2mm)	8.8	250V 13A UL CSA VDE






LS-60
(IEC320.C13)



LS-60L
(IE320.C13)

Standard: CEE 7 /
EN50075 / IEC 60320-1

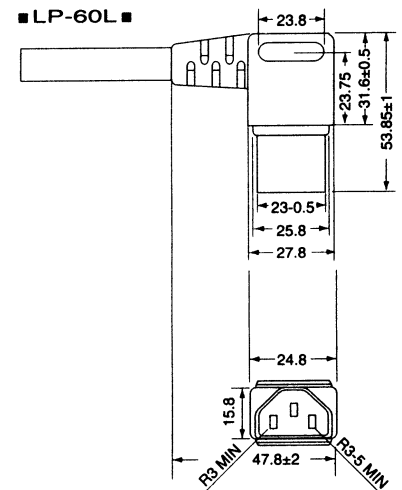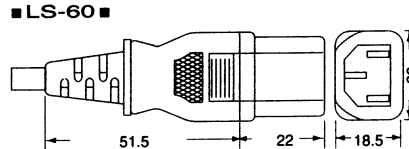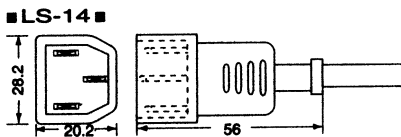



PLUG

CORD

CONNECTOR



LP-40

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VV-F	3	0.75mm ² (24/0.2mm)	6.3	250V 10-16A
H05VV-F	3	0.75mm ² (24/0.2mm)	7.2	250V 10-16A
H05VV-F	3	1.0mm ² (32/0.2mm)	7.5	250V 10-16A





LS-60
(IEC320.C13)



LS-60L
(IE320.C13)

DEMKO
Denmark Standard Power
Supply Cords & Cord Sets

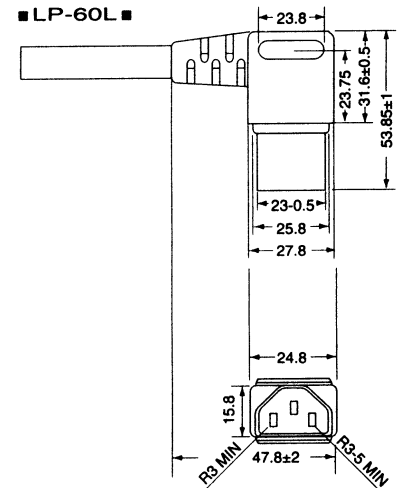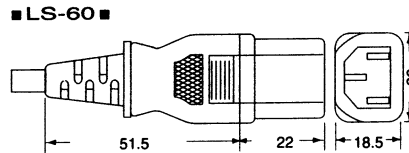



PLUG

CORD

CONNECTOR



LP-37

Type of Cordage	No. of conductors	Cross-Sectional Area (No./mm)	Approx. O.D. (mm)	Rating
H03VV-F	3	0.75mm ² (24/0.2mm)	6.3	250V 10A
H05VV-F	3	0.75mm ² (24/0.2mm)	7.2	250V 10A
H05VV-F	3	1.0mm ² (32/0.2mm)	7.5	250V 10A




LS-60
(IEC320.C13)




LS-60L
(IE320.C13)

SEV
Switzerland Standard Power
Supply Cords & Cord Sets

■ LP-37 ■

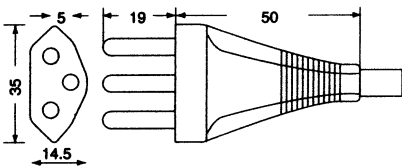

■ LS-60 ■

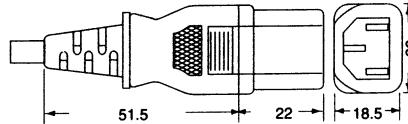

■ LP-60L ■

