





ST 18/3 – Series Power Supply Cords 250 V AC, 16 Amp.

Compact Connector Series
ST 18/3 with mounted cords
from 0.5 m to 4 m. Special
length available on request.

Ratings (Nominal): 250 V AC, 16 Amp.
Continuous Temp.: 110 °C Plug / Connector
70 °C Cord

IP Rating: IP 20 according EN 60529
Materials: Thermoplast, Brass Contacts
Cord Types: H05VV-F 3G1.5 or
H05VV-F 3G2.5 (on Request)

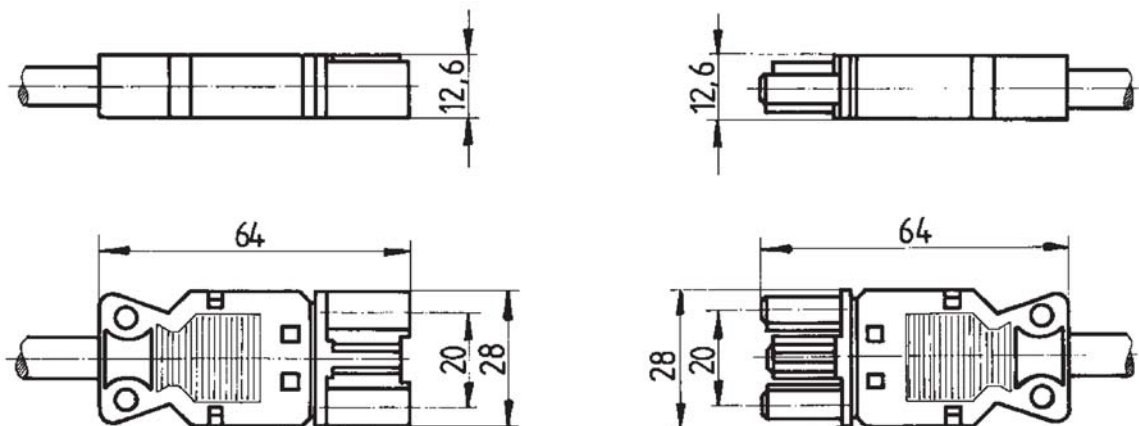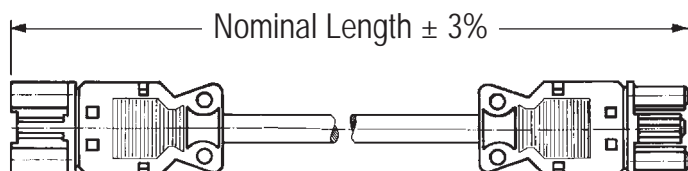

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com





ST 18/3 – Series Power Supply Cords 250 V AC, 16 Amp.

Wire Type and Size	Nominal Length	Catalog Number		VPE/Pack
		Black	White	



Connector / Plug

H05VV-F 3G1.5 mm ²	0.5 m	94.732.0500.1	94.732.0500.2	100
H05VV-F 3G1.5 mm ²	1.0 m	94.732.1000.1	94.732.1000.2	75
H05VV-F 3G1.5 mm ²	1.5 m	94.732.1500.1	94.732.1500.2	50
H05VV-F 3G1.5 mm ²	2.0 m	94.732.2000.1	94.732.2000.2	40
H05VV-F 3G1.5 mm ²	2.5 m	94.732.2500.1	94.732.2500.2	25
H05VV-F 3G1.5 mm ²	3.0 m	94.732.3000.1	94.732.3000.2	25
H05VV-F 3G1.5 mm ²	3.5 m	94.732.3500.1	94.732.3500.2	25
H05VV-F 3G1.5 mm ²	4.0 m	94.732.4000.1	94.732.4000.2	25



Connector / —
Outer Jacket Removed 35 mm, Stripped 7 mm
Untrasonic Compressed Conductor Ends

H05VV-F 3G1.5 mm ²	0.5 m	94.732.0503.1	94.732.0503.2	100
H05VV-F 3G1.5 mm ²	1.0 m	94.732.1003.1	94.732.1003.2	100
H05VV-F 3G1.5 mm ²	1.5 m	94.732.1503.1	94.732.1503.2	50
H05VV-F 3G1.5 mm ²	2.0 m	94.732.2003.1	94.732.2003.2	50
H05VV-F 3G1.5 mm ²	2.5 m	94.732.2503.1	94.732.2503.2	40
H05VV-F 3G1.5 mm ²	3.0 m	94.732.3003.1	94.732.3003.2	25
H05VV-F 3G1.5 mm ²	3.5 m	94.732.3503.1	94.732.3503.2	25
H05VV-F 3G1.5 mm ²	4.0 m	94.732.4003.1	94.732.4003.2	25



Plug / —
Outer Jacket Removed 35 mm, Stripped 7 mm
Untrasonic Compressed Conductor Ends

H05VV-F 3G1.5 mm ²	0.5 m	94.732.0504.1	94.732.0504.2	100
H05VV-F 3G1.5 mm ²	1.0 m	94.732.1004.1	94.732.1004.2	100
H05VV-F 3G1.5 mm ²	1.5 m	94.732.1504.1	94.732.1504.2	50
H05VV-F 3G1.5 mm ²	2.0 m	94.732.2004.1	94.732.2004.2	50
H05VV-F 3G1.5 mm ²	2.5 m	94.732.2504.1	94.732.2504.2	40
H05VV-F 3G1.5 mm ²	3.0 m	94.732.3004.1	94.732.3004.2	25
H05VV-F 3G1.5 mm ²	3.5 m	94.732.3504.1	94.732.3504.2	25
H05VV-F 3G1.5 mm ²	4.0 m	94.732.4004.1	94.732.4004.2	25




Connector / Angle Plug DIN 49441
Double Earthing System according
DIN 49441 Form R2/CEE 7 Sheet VII

H05VV-F 3G1.5 mm ²	1.5 m	94.732.1507.1	94.732.1507.2	50
H05VV-F 3G1.5 mm ²	2.0 m	94.732.2007.1	94.732.2007.2	40
H05VV-F 3G1.5 mm ²	2.5 m	94.732.2507.1	94.732.2507.2	25



Fixing Bracket for Use
with ST 18/3 Series

Fixing Bracket for ST 18/3 Series	05.587.3156.1	05.587.3156.0	50
-----------------------------------	----------------------	----------------------	----

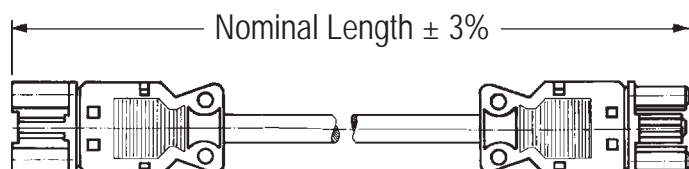

Note: Not Bold printed catalog numbers available on special order only!
Minimum order quantity is 50 ea per length.