


## SKINTOP<sup>®</sup> GMP-GL

Glass fibre reinforced plastic locknut

### Application

Locknuts are used everywhere where cable glands are to be attached but where no connecting thread can be provided. The locknut satisfies DIN 46320 and is available in 3 colours, with and without collar.

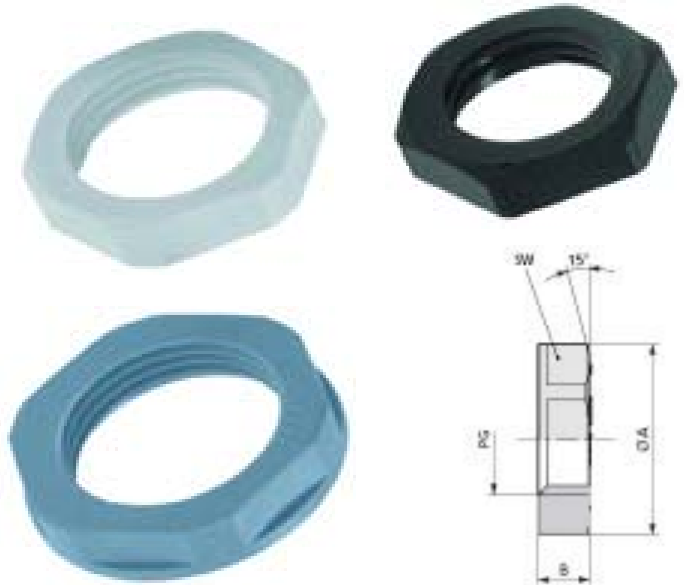

### Technical Data

Material:  
polyamide, glass fibre reinforced

Standard colour:  
RAL 7001 silver grey  
RAL 7035 light grey  
RAL 9005 black/UV-resistant

Temperature range:  
-20°C to +100°C

On request:  
available  
- without collar  
- in the colours  
RAL 7001, RAL 7035,  
RAL 9005

Catalog No.	Type PG-size	Wrench Size	PU pieces
SKINTOP <sup>®</sup> GMP-GL silvergrey with collar			
5301.9000	GMP-GL 7	19	100
5301.9010	GMP-GL 9	22	100
5301.9020	GMP-GL 11	24	100
5301.9030	GMP-GL 13,5	27	100
5301.9040	GMP-GL 16	30	100
5301.9050	GMP-GL 21	36	50
5301.9060	GMP-GL 29	46	50
5301.9070	GMP-GL 36	60	25
5301.9080	GMP-GL 42	65	25
5301.9090	GMP-GL 48	70	25
SKINTOP <sup>®</sup> GMP-GL black with collar			
5301.9200	GMP-GL 7	19	100
5301.9210	GMP-GL 9	22	100
5301.9220	GMP-GL 11	24	100
5301.9230	GMP-GL 13,5	27	100
5301.9240	GMP-GL 16	30	100
5301.9250	GMP-GL 21	36	50
5301.9260	GMP-GL 29	46	50
5301.9270	GMP-GL 36	60	25
5301.9280	GMP-GL 42	65	25
5301.9290	GMP-GL 48	70	25