

Industrial Specification Grade Hart-Lock® Locking Devices

3 Pole, 4 Wire Grounding
NEMA L14-20, 20A 125/250V
NEMA L15-20, 20A 250V 3Ø
NEMA L16-20, 20A 480V 3Ø



20A 3 Pole, 4 Wire Grounding Industrial Specification Grade Plugs and Connectors

FEATURES

- Back wire Dead-Front design.
- Neoprene gasket seals cord hole from dust and debris.
- Inserts included for three separate cord grip ranges.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Clear cover over wiring compartments allow easy inspection of wiring terminations.
- Combination head screws standard – slot/Phillips in the U.S.
- Add -C to catalog number for Canadian screws – slot/Robertson head combination.

Industrial Specification Grade Locking Plugs and Connectors

Rating A	V/AC	NEMA	Description/ Cord Diameter	Color	Plug	Catalog No. Connector
20	125/250	L14-20	Standard: 0.38"-1.00" (9.5mm-25.4mm)	Black & White	CWL1420P	CWL1420C
			Standard: 0.38"-1.00"	Black	CWL1420PBK	CWL1420CBK
			Corrosion Resistant: .38"-1.00" (9.5mm-25.4mm)	Yellow	CRL1420P	CRL1420C
20	250V 3Ø	L15-20	Standard: 0.38"-1.00" (9.5mm-25.4mm)	Black & White	CWL1520P	CWL1520C
			Corrosion Resistant: .38"-1.00" (9.5mm-25.4mm)	Yellow	CRL1520P	CRL1520C
20	480V 3Ø	L16-20	Standard: 0.38"-1.00" (9.5mm-25.4mm)	Black & White	CWL1620P	CWL1620C
			Standard: 0.38"-1.00"	Black	CWL1620PBK	CWL1620CBK

20A 3 Pole, 4 Wire Industrial Specification Grade Flanged Inlet and Outlet


FEATURES

- Mounting holes interchangeable with competitive units.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Combination head screws standard – slot/Phillips in the U.S.
- Add "-C" to catalog number for Canadian screws – slot/Robertson head combination.

Industrial Specification Grade Flanged Inlets and Outlets

Rating A	V/AC	NEMA	Color	Inlet	Catalog No. Outlet
20	125/250	L14-20	Black & White	CWL1420FI	CWL1420FO
			Black	6405BK	6406BK
20	250V 3Ø	L15-20	Black & White	CWL1520FI	CWL1520FO
20	480V 3Ø	L16-20	Black & White	CWL1620FI	CWL1620FO

NOTE: Weather Protective Covers, Enclosures and Boots that may be used with these products are described on pages E-71 – E-74 in this section.

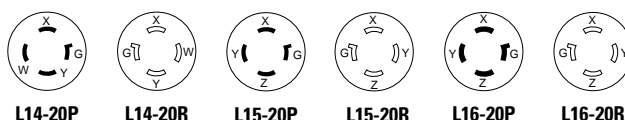

CWL1520P



CWL1420FO



6405BK



CWL1620FO

INDUSTRIAL
COMMERCIAL

TESTING & CODE COMPLIANCE

- Listed to UL 498 Plugs, Connectors, Flanged Inlet: (file no. E3663). Flanged Outlets: (file no. E2369).
- cUL Certified to CSA C22.2 no. 42 (file no. E3663 and E2369).

MATERIAL CHARACTERISTICS

Nylon.
Environmental:
Flammability per UL 94 requirements.
Flanged Inlets and Outlets are V2 rated.
Temperature Rating:
Plugs, Connectors: -40°C to 75°C;
Flanged Inlets, Outlets: -40°C to 80°C.