

Industrial Specification Grade Corrosion Resistant Locking Plugs & Connectors

2-Pole, 3-Wire Grounding
NEMA L5-20, 20A 125V
NEMA L6-20, 20A 250V
NEMA L5-30, 30A 125V
NEMA L6-30, 30A 250V




Industrial Specification Grade 2 Pole, 3 Wire Locking Plugs & Connectors

FEATURES

- Nickel plated blades, contacts and terminals for corrosion resistance.
- Nylon construction.
- Back wire Dead-Front design.
- Neoprene gasket seals cord hole from dust and debris.
- Inserts included for three separate cord grip ranges.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Clear cover over wiring compartments allow easy inspection of wiring terminations.
- Combination head screws standard – slot/Phillips in the U.S.
- Add -C to catalog number for Canadian screws – slot/Robertson head combination.

Corrosion Resistant Plugs & Connectors


Rating A	V/AC	NEMA	Cord Diameter	Color	Catalog No.	
					Plug	Connector
20	125	L5-20	0.375-1.000" (19.05mm-25.4mm)	Yellow	CRL520P	CRL520C
20	250	L6-20	0.375-1.000" (19.05mm-25.4mm)	Yellow	CRL620P	CRL620C
30	125	L5-30	0.375-1.000" (19.05mm-25.4mm)	Yellow	CRL530P	CRL530C
30	250	L6-30	0.375-1.000" (19.05mm-25.4mm)	Yellow	CRL630P	CRL630C



CRL520P



CRL520C




CRL530P



CRL530C

INDUSTRIAL
COMMERCIAL
RESIDENTIAL

M-4
CORROSION
RESISTANT &
MARINE GRADE
PRODUCTS

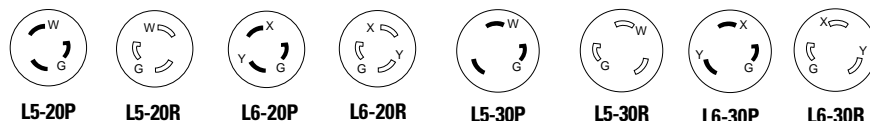

TESTING & CODE COMPLIANCE

- Listed to UL 498 (file no. E3663).
- cUL Certified to CSA C22.2 no.42 (file no. E3663).

MATERIAL CHARACTERISTICS

Nylon.
Temperature Rating:
-40°C to 75°C.