


## Germany / Europe - Non-Detachable Power Plug

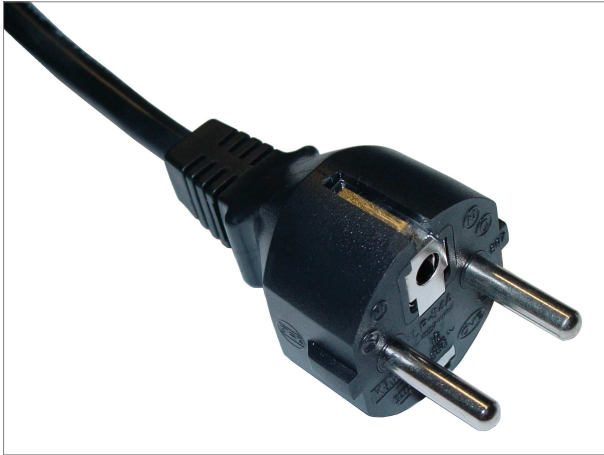

Catalog No. : LP-34A

Standard : CEE 7 VII

Ratings : 16A, 250V AC

Applications : For Class I Equipment

### Germany / Europe



### Available with Cords:


H03VV-F  
H05VV-F

H05RN-F  
H05RR-F

P5SA  
P5SC

Cordage Type	Jacket Material	Conductor Size (mm <sup>2</sup> )	No. of Cond.	Insulation Material	Stranding (pcs/mm)	Cord Jacket Dia. (mm)	Temp. Rating
H03VV-F	PVC	0.75	3	PVC	24/0.20	6.35 ± 0.2	70°C
H05RN-F	CPE	0.75	3	EPR	24/0.197	6.7 ± 0.2	70°C
H05RN-F	CPE	1	3	EPR	32/0.197	7.1 ± 0.3	70°C
H05RR-F	CPE	0.75	3	EPR	24/0.197	6.7 ± 0.2	70°C
H05RR-F	CPE	1	3	EPR	32/0.197	7.1 ± 0.3	70°C
H05VV-F	PVC	0.75	3	PVC	24/0.20	7.2 ± 0.2	70°C
H05VV-F	PVC	1	3	PVC	32/0.20	7.5 ± 0.2	70°C
H05VV-F	PVC	1.5	3	PVC	30/0.26	8.6 ± 0.2	70°C
P5SA	PVC	0.75	3	PVC	24/0.20	7.2 ± 0.2	70°C
P5SC	PVC	0.75	3	PVC	24/0.20	7.9 ± 0.2	70°C

### Dimensional Data:

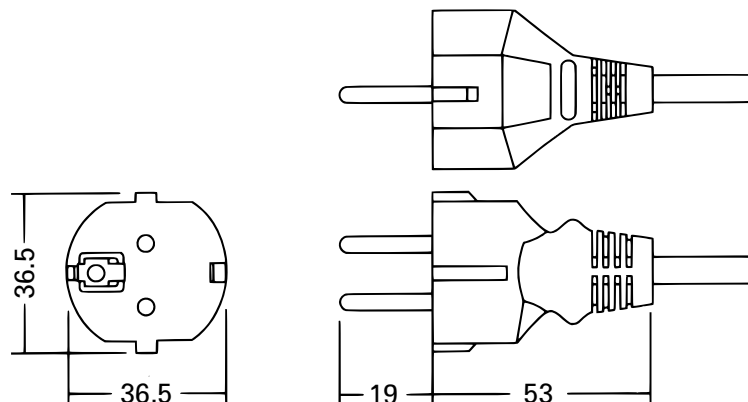

Dimensions in mm