



Europe Non-Detachable Appliance Power Connector (C13)

Catalog No. LS-60


Standards IEC 60320-1 (C13)
Ratings 10 Amp, 250 Volt AC
Applications For Class I Equipment
Compliance RoHS



Type of Cordage	No. of Cond.	Cross-Sectional Area (mm ²)	PVC Jacket / Approx. O.D. Thickness (Ø mm ±0.2)	Temperature Rating (°C)	PVC Insulation Thickness O.D.	Stranding No. / mm	Conductor Type
H03VV-F	3	0.75	0.60	70 °C	0.50	2.20 24/0.20	Annealed Soft Bare Copper
H05VV-F	3	0.75	0.80	70 °C	0.60	2.40 24/0.20	Annealed Soft Bare Copper
H05VV-F	3	1.0	0.80	70 °C	0.60	2.60 32/0.20	Annealed Soft Bare Copper
H05VV-F	3	1.5	1.00	70 °C	0.65	3.00 30/0.26	Annealed Soft Bare Copper
P5SA ¹	3	0.75	0.80	70 °C	0.60	2.40 24/0.20	Annealed Soft Bare Copper
P5SC ²	3	0.75	0.80	70 °C	0.60	2.40 24/0.20	Annealed Soft Bare Copper

¹ H05VV-F (P5SA) Foil Aluminum Shield (VDE only), ² H05VV-F (P5SC) Braid Tinned Shielded (VDE only)

Dimensional Data:

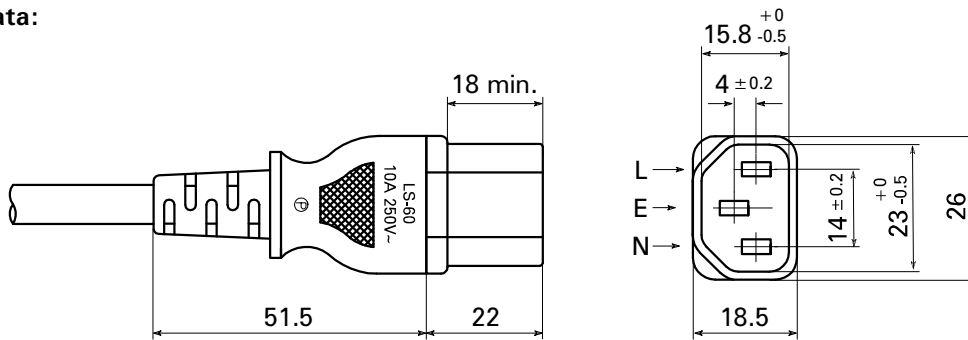

The molded connector shall comply with IEC 60320-1 standards (C13 Connector).

Technical data and informations are nominal only and subject to change without notice. Dimensions in mm.