

EMT FITTINGS DIE CAST - COMPRESSION COUPLINGS

Applications


- For use to economically couple two ends of EMT conduit
- compression couplings are suitable for applications above 600V
- 1/2" to 4" couplings provide concrete-tight connections

Product Features


- Rugged metallic construction provides mechanical protection for the raceway
- Hex compression nuts assure easy wrench installation

Compliances

-  - Standard 514B
-  - C22.2 #18



**COUPLINGS
DIE CAST ZINC**

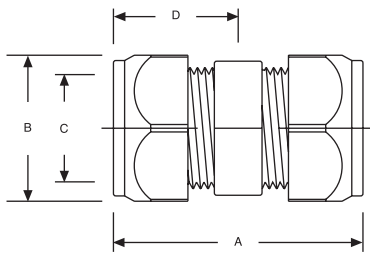

A = Overall length
B = Compression nut O.D.
C = Compression nut I.D.
D = Length to center stop

ORDERING INFORMATION - DIMENSIONS

COUPLINGS - DIE CAST ZINC				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
2822	1/2"	50	500	—
2823	3/4"	25	250	—
2824	1"	50	200	—
2825	1-1/4"	25	100	—
2826	1-1/2"	10	40	—
2828	2"	5	20	—
2870	2-1/2"	—	12	—
2872	3"	—	12	—
2874	3-1/2"	—	10	—
2876	4"	—	6	—

DIMENSIONS				
CATALOG NUMBER	A	B	C	D
2822	1-45/64"	1-7/64"	23/32"	27/32"
2823	1-45/64"	1-13/32"	59/64"	13/16"
2824	1-31/32"	1-11/16"	1-3/16"	31/32"
2825	2"	2-11/64"	1-17/32"	31/32"
2826	3-1/16"	2-13/32"	1-3/4"	1- 1/2"
2828	3-3/32"	2-13/16"	2-3/16"	1-17/32"
2870	3-9/16"	3-17/32"	2-7/8"	1-45/64"
2872	3-9/16"	4-3/16"	3-17/32"	1- 3/4"
2874	3-13/16"	4-3/4"	4-1/16"	1-27/32"
2876	3-27/32"	5-5/16"	4-1/2"	1-7/8"