

## RIGID AND IMC FITTINGS STEEL/MALLEABLE IRON - COMPRESSION COUPLINGS



### Applications


- For use to couple two ends of conduit
- 1/2" to 4" couplings provide concrete-tight connectors

### Product Features

- All steel/malleable construction insures mechanical protection for the raceway
- Hex compression nuts assure easy wrench installation
- All components are zinc electro plated for corrosion protection

### Compliances


-  - Standard 514B
-  - C22.2 #18 (1822-1826)



COUPLINGS  
STEEL/MALLEABLE IRON

### ORDERING INFORMATION - DIMENSIONS

COUPLINGS - STEEL/MALLEABLE IRON				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
1822	1/2"	25	100	—
1823	3/4"	10	50	—
1824	1"	5	25	—
1825	1-1/4"	5	25	—
1826	1-1/2"	—	5	—
1828	2"	—	5	—
1830	2-1/2"	—	5	—
1832	3"	—	1	—
1834	3-1/2"	—	1	—
1836	4"	—	1	—

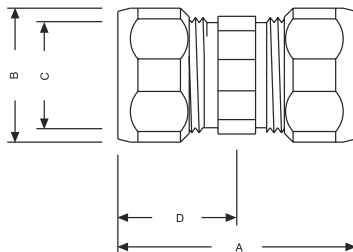

A = Overall length  
B = Compression nut O.D.  
C = Compression nut I.D.  
D = Length to center stop

DIMENSIONS				
CATALOG NUMBER	A	B	C	D
1822	1-3/4"	1-5/32"	55/64"	27/32"
1823	1-15/16"	1-7/16"	1-5/64"	29/32"
1824	2-1/16"	1-3/4"	1-11/32"	31/32"
1825	2-7/16"	2-5/32"	1-45/64"	1-1/8"
1826	2-19/32"	2-3/8"	1-15/16"	1-1/4"
1828	3-7/32"	3-1/16"	2-13/32"	1-1/2"
1830	5-3/4"	3-15/16"	2-29/32"	2-1/2"
1832	5-23/32"	4-21/32"	3-35/64"	2-1/2"
1834	6-1/2"	5-13/64"	4-3/64"	3-3/16"
1836	6-13/16"	5-3/4"	4-9/16"	3-3/32"