

FLEXIBLE METAL CONDUIT FITTINGS DIE CAST ZINC - STRAIGHT SQUEEZE CONNECTORS


Application


- For use in dry locations to bond flexible metal conduit to a box or enclosure

Product Feature

- Rugged metallic construction insures mechanical protection for the raceway

Compliance

-  - Standard 514B

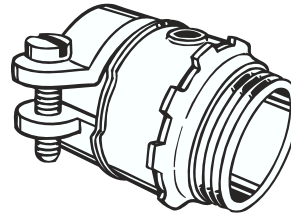


STRAIGHT SQUEEZE UNINSULATED
DIE CAST ZINC

ORDERING INFORMATION - DIMENSIONS

STRAIGHT SQUEEZE - UNINSULATED - DIE CAST ZINC				
CATALOG NUMBER	TRADE SIZE	UNIT. CTN. QTY.	SHIP. CTN. QTY.	UPC BAR CODE
2191	3/8" *	50	500	—
2192	1/2"	25	250	—
2193	3/4"	25	250	—
2194	1"	10	100	—
2195	1-1/4"	10	100	—
2196	1-1/2"	5	50	—
2198	2"	10	40	—

* For 1/2" knockout

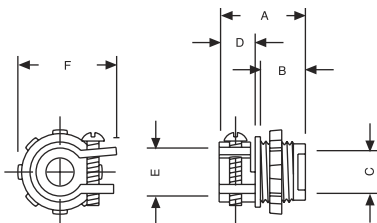

- A = Overall length
- B = Thread length and thread spec
- C = Throat I.D.
- D = Length to conduit stop
- E = Clamping range
- F = Maximum width body

DIMENSIONS							
CATALOG NUMBER	A	B	B THD. SPEC.	C	D	E	F
2191	15/16"	13/32"	1/2-14	11/32"	13/32"	17/32"-21/32"	1-1/16"
2192	1-7/16"	13/32"	1/2-14	5/8"	1/2"	27/32"-31/32"	1-3/8"
2193	1-9/16"	7/16"	3/4-14	13/16"	21/32"	31/32"-1-5/32"	1-19/32"
2194	1-3/4"	9/16"	1-11-1/2	1-1/32"	9/16"	1-3/16"-1-7/16"	1-27/32"
2195	2"	5/8"	1-1/4-11-1/2	1-5/16"	1-3/16"	1-15/32"-1-11/16"	2-1/8"
2196	2-1/16"	11/16"	1-1/2-11-1/2	1-19/32"	1-5/16"	1-3/4"-2"	2-3/8"
2198	2-5/16"	5/8"	2-11-1/2	2"	1-9/16"	2-5/32"-2-1/2"	2-15/16"