

FLEXIBLE METAL CONDUIT FITTINGS DIE CAST ZINC/STEEL COMBINATION COUPLINGS AND NAIL-UP STRAPS



Combination Couplings Applications

- For use when coupling flexible metal conduit to EMT conduit
- Use Cat. Nos. 1482-1484 when coupling flexible metal conduit to EMT conduit

Combination Couplings Product Feature

- Rugged metallic construction insures mechanical protection

Compliances


-  - Standard 514B
-  - Certified for Canada

Nail-Up Straps Application


- For use in mounting flexible metal conduit, armored cable, and MC cable

Nail-Up Straps Product Feature

- Stamped steel straps are pregalvanized for added corrosion protection



FLEX-EMT COUPLINGS
SCREW-IN/COMPRESSION
DIE CAST ZINC



NAIL-UP STRAPS
STEEL

ORDERING INFORMATION - DIMENSIONS

FLEX-EMT COUPLINGS SCREW-IN/COMPRESSION - DIE CAST ZINC					
CATALOG NUMBER	FLEX SIZE	EMT SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
1482	1/2"	1/2"	50	500	—
1483	3/4"	3/4"	25	250	—
1484	1"	1"	25	250	—


DIMENSIONS		
CATALOG NUMBER	A	B
1482	.84"	1.10"
1483	.95"	1.30"
1484	1.11"	1.62"

NAIL-UP STRAPS - STEEL				
CATALOG NUMBER	TRADE SIZE	UNIT. CTN. QTY.	SHIP. CTN. QTY.	UPC BAR CODE
2252*	3/8" *	100	1000	—
2253*	1/2" **	100	1000	—

*For 3/8" flexible metal conduit. Also suitable for AC and MC cable

**For 1/2" flexible metal conduit. Also suitable for AC and MC cable

DIMENSIONS		
CATALOG NUMBER	A	B
2252	1-1/16"	2-3/16"
2253	1-1/4"	2-19/64"

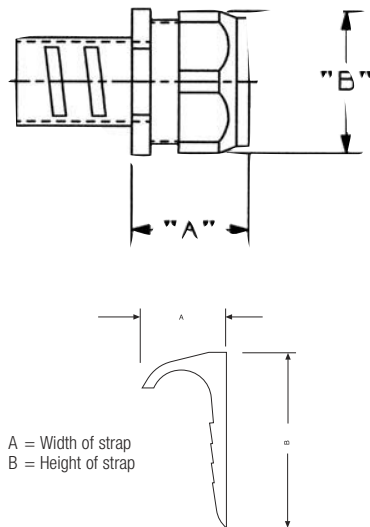

A = Width of strap
B = Height of strap