


Low Voltage General Purpose Transformers



FEATURES

- UL Listed , CSA Certified.
- 100, 150, 300, 600, 750, 1000 VA.
- 1 Phase, 60 Hz, 120 or 240 volt input.
- 12 or 24 volt output.
- Input Auto-Thermal reset switch.
- Output circuit breaker.
- Fully encapsulated core and coil.
- Full fault current carrying Faraday Shield.
- Flexible copper leadwire terminations.
- UL class 180°C insulation system 115°C rise.
- UL Type 2 enclosure.
- Keyhole slotted wall mounting brackets.
- Black finish.
- Bottom access.
- Two 0.875 (2.2 cm) single knockouts each side.
- Two dual 0.875 (2.2 cm) and 1.125 (2.9 cm) knockouts on bottom cover.

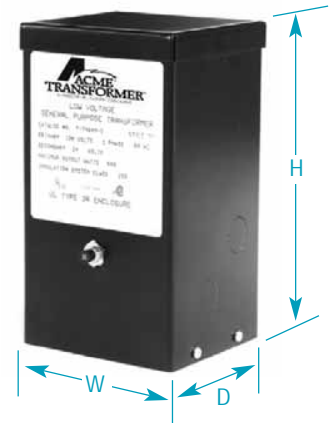

GROUP V

120 PRIMARY VOLTS – 12 SECONDARY VOLTS, TWO WINDINGS, 1Ø, 60 Hz

VA	CATALOG NO.	APPROX. DIMENSIONS INCHES (CM.)			APPROX. SHIP WEIGHT LBS. (KG.)	CB RATING	CB STYLE
		HEIGHT	WIDTH	DEPTH			
100	T-1-79600-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	15 AMP	Push To Reset Thermal Breaker
150	T-1-79620-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	20 AMP	Push To Reset Thermal Breaker
300	T-1-79621-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	40 AMP	Push To Reset Thermal Breaker
600	T-1-79622-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	60 AMP	Magnetic Toggle On/Off Breaker
750	T-1-79603-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	75 AMP	Magnetic Toggle On/Off Breaker
1000	T-1-79604-S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	100 AMP	Magnetic Toggle On/Off Breaker

120 PRIMARY VOLTS – 24 SECONDARY VOLTS, TWO WINDINGS, 1Ø, 60 Hz

VA	CATALOG NO.	APPROX. DIMENSIONS INCHES (CM.)			APPROX. SHIP WEIGHT LBS. (KG.)	CB RATING	CB STYLE
		HEIGHT	WIDTH	DEPTH			
100	T-1-79605-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	7 AMP	Push To Reset Thermal Breaker
150	T-1-79623-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	10 AMP	Push To Reset Thermal Breaker
300	T-1-79624-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	20 AMP	Push To Reset Thermal Breaker
600	T-1-79625-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	40 AMP	Push To Reset Thermal Breaker
750	T-1-79608-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	50 AMP	Push To Reset Thermal Breaker
1000	T-1-79609-S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	50 AMP	Magnetic Toggle On/Off Breaker

240 PRIMARY VOLTS – 24 SECONDARY VOLTS, TWO WINDINGS, 1Ø, 60 Hz

VA	CATALOG NO.	APPROX. DIMENSIONS INCHES (CM.)			APPROX. SHIP WEIGHT LBS. (KG.)	CB RATING	CB STYLE
		HEIGHT	WIDTH	DEPTH			
100	T-1-79615-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	7 AMP	Push To Reset Thermal Breaker
150	T-1-79629-S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	10 AMP	Push To Reset Thermal Breaker
300	T-1-79630-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	20 AMP	Push To Reset Thermal Breaker
600	T-1-79631-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	40 AMP	Push To Reset Thermal Breaker
750	T-1-79618-S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	50 AMP	Push To Reset Thermal Breaker
1000	T-1-79619-S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	50 AMP	Magnetic Toggle On/Off Breaker