


Straight Blade Devices Commercial Specification Grade Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

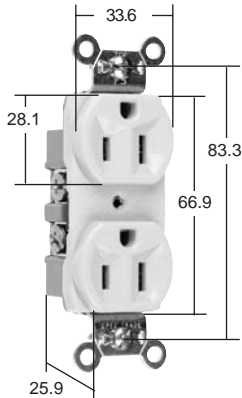


CR15-I

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch (0.8 mm) thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Available with #14 – #10 AWG solid side wire only and side and internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL UL498	CSA C22.2 No. 42
Duplex Receptacles Side Wire					
CR15-I	15 125	Ivory	5-15R	•	•
CR15-W	15 125	White	5-15R	•	•
CR15	15 125	Brown	5-15R	•	•
CR15-GRY	15 125	Gray	5-15R	•	•
CR15-LA	15 125	Light Almond	5-15R	•	•
CR20-I	20 125	Ivory	5-20R	•	•
CR20-W	20 125	White	5-20R	•	•
CR20	20 125	Brown	5-20R	•	•
CR20-GRY	20 125	Gray	5-20R	•	•
CR20-BK	20 125	Black	5-20R	•	•
CR20-LA	20 125	Light Almond	5-20R	•	•
Duplex Receptacles Back & Side Wire					
BR15-I	15 125	Ivory	5-15R	•	•
BR15-W	15 125	White	5-15R	•	•
BR15	15 125	Brown	5-15R	•	•
BR15-GRY	15 125	Gray	5-15R	•	•
BR15-LA	15 125	Light Almond	5-15R	•	•
BR20-I	20 125	Ivory	5-20R	•	•
BR20-W	20 125	White	5-20R	•	•
BR20	20 125	Brown	5-20R	•	•
BR20-GRY	20 125	Gray	5-20R	•	•
BR20-LA	20 125	Light Almond	5-20R	•	•



All devices listed on this page conform to NEMA WD-1.