


Straight Blade Devices Heavy-Duty Specification Grade Single Receptacles

15 & 20A, 125 & 250V

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- One-piece brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

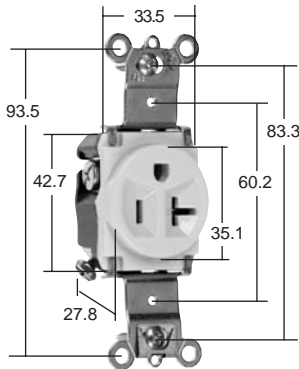

5361-I

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Single Receptacles Back & Side Wire						
5261-I	15 125	Ivory	5-15R	•	•	•
5261-W	15 125	White	5-15R	•	•	•
5261	15 125	Brown	5-15R	•	•	•
5261-GRY	15 125	Gray	5-15R	•	•	•
5261-BK	15 125	Black	5-15R	•	•	•
5261-RED	15 125	Red	5-15R	•	•	•
5261-LA	15 125	Light Almond	5-15R	•	•	•
5361-I	20 125	Ivory	5-20R	•	•	•
5361-W	20 125	White	5-20R	•	•	•
5361	20 125	Brown	5-20R	•	•	•
5361-GRY	20 125	Gray	5-20R	•	•	•
5361-BK	20 125	Black	5-20R	•	•	•
5361-RED	20 125	Red	5-20R	•	•	•
5361-LA	20 125	Light Almond	5-20R	•	•	•
5671-I	15 250	Ivory	6-15R	•	•	•
5671	15 250	Brown	6-15R	•	•	•
5671-LA	15 250	Light Almond	6-15R	•	•	•
5871-I	20 250	Ivory	6-20R	•	•	•
5871-W	20 250	White	6-20R	•	•	•
5871	20 250	Brown	6-20R	•	•	•
5871-GRY	20 250	Gray	6-20R	•	•	•
5871-BK	20 250	Black	6-20R	•	•	•
5871-RED	20 250	Red	6-20R	•	•	•
5871-LA	20 250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R



NEMA
6-15R



NEMA
6-20R

All devices listed on this page conform to NEMA WD-1.