


## Straight Blade Devices Dead Front Devices, Angle Plugs, Flanged Inlets & Outlets

2 Pole, 3 Wire Grounded 15 & 20A, 125 & 250V


**IP20**  
Suitability




**5276-BK**




**5296-BK**

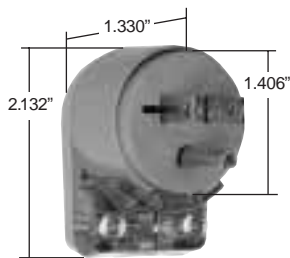

**5266-SSAN**

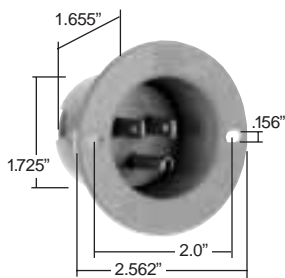

**5278-SS**

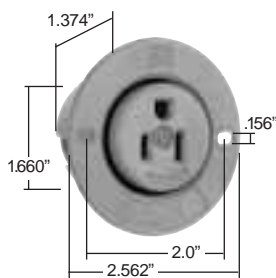

**5279-SS**

### Features

#### Dead Front

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- All nylon construction, provides excellent impact & chemical resistance.
- Simple turn & twist assembly providing quick installation.

#### Angle Plug


- All thermoplastic body construction, excellent impact & chemical resistance.
- Face rotates in 4 positions, easy alignment no matter which direction equipment is coming from.
- Color-coded brass alloy blade construction, easy to identify.

#### Flanged Inlets/Outlets

- Molded of high-impact & chemical resistant thermoplastic material.
- NEMA Configuration information molded onto device flange, allows for easy field identification.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596-G	C22.2 42M
<b>Dead Front Plugs &amp; Connectors</b>							
5276-BK	15 125	Plug, Black	.230"-.655"	5-15P	•	•	•
5296-BK	15 125	Connector, Black	.230"-.655"	5-15R	•	•	•
5765-BK	20 125	Plug, Black	.230"-.655"	5-20P	•	•	•
5374-BK	20 125	Connector, Black	.230"-.655"	5-20R	•	•	•
5666-BK	15 250	Plug, Black	.230"-.655"	6-15P	•	•	•
5669-BK	15 250	Connector, Black	.230"-.655"	6-15R	•	•	•
5864-BK	20 250	Plug, Black	.230"-.655"	6-20P	•	•	•
5866-BK	20 250	Connector, Black	.230"-.655"	6-20R	•	•	•
<b>Hospital Grade - Angle Plugs</b>							
5266-HGAN	15 125	4-Position, Gray	.230"-.655"	5-15P	•	•	•
5366-HGAN	20 125	4-Position, Gray	.230"-.655"	5-20P	•	•	•
<b>Angle Plugs</b>							
5266-SSAN	15 125	4-Position, Gray	.230"-.655"	5-15P	•	•	•
5366-SSAN	20 125	4-Position, Gray	.230"-.655"	5-20P	•	•	•
5666-SSAN	15 250	4-Position, Gray	.230"-.655"	6-15P	•	•	•
5466-SSAN	20 250	4-Position, Gray	.230"-.655"	6-20P	•	•	•
<b>Flanged Inlets &amp; Outlets</b>							
*5278-SS	15 125	Inlet, Gray		5-15P	•	•	•
*5279-SS	15 125	Outlet, Gray		5-15R	•	•	•
5378-SS	20 125	Inlet, Gray		5-20P	•	•	•
5379-SS	20 125	Outlet, Gray		5-20R	•	•	•
5678-SS	15 250	Inlet, Gray		6-15P	•	•	•
5679-SS	15 250	Outlet, Gray		6-15R	•	•	•
5478-SS	20 250	Inlet, Gray		6-20P	•	•	•
5479-SS	20 250	Outlet, Gray		6-20R	•	•	•

\*Also available in black; add - BK suffix.

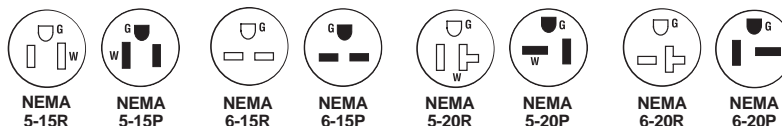

All devices listed on this page conform to NEMA WD-1.

Catalog Number	Description
<b>Accessories</b>	
WPG1	Weatherproof Cover for Flanged Inlets and Outlets

For further information consult the Weatherproof Section R