

Ductless SPLIT SYSTEMS

P R E L I M I N A R Y




2009
COOL ONLY | HEAT PUMPS



Ductless Split Systems

The ultimate room air conditioner

Easy to install. Exceptionally quiet. Totally flexible.

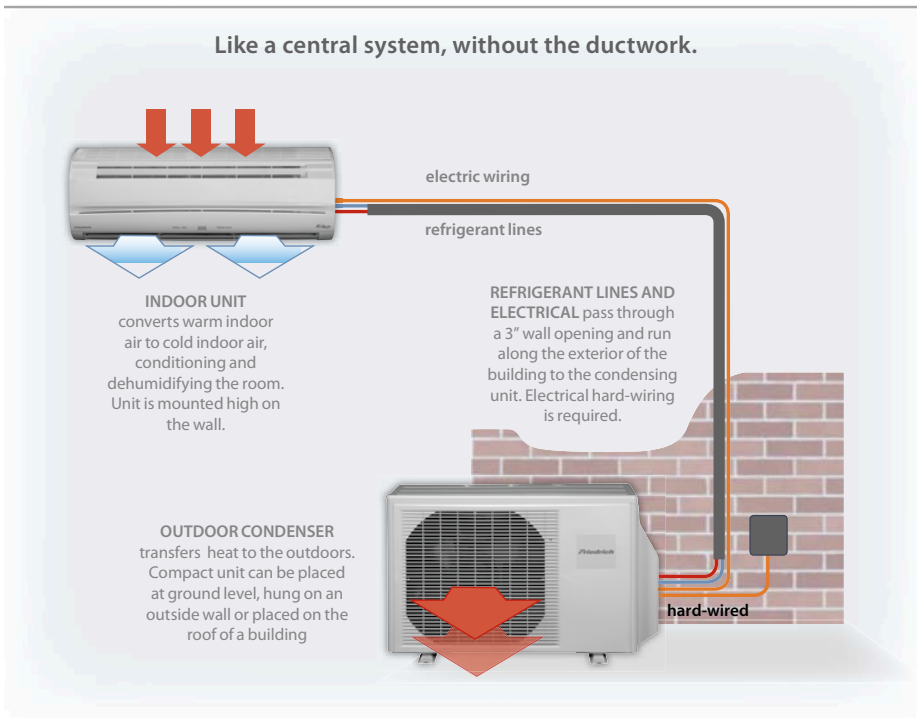

Ductless splits are an innovative and efficient alternative to window and thru-the-wall units. They have the benefits of a central system, without the difficulty and expense of installing ductwork. These are only a few of the benefits of ductless...

- Unobstructed window views.
- No need to uninstall and store unit during the winter.
- Independently-controlled zone cooling means up to four separate indoor units working from a single outdoor unit.
- Save money by turning off units in unoccupied rooms.
- Set room temperatures based on individual preferences
- Zero duct loss; no loss of performance from leaky ducts
- No dust, germs and allergens spread via ductwork

INVERTER TECHNOLOGY



Easy to install

ductless split systems have the advantages of a ducted installation without the high material and labor costs. Absolutely no ductwork is required, so most systems can be installed and running in a few hours.

SEER ratings up to 20.0

All ductless models exceed the federal 13.0 SEER requirements. And, a full one-third of our models have super high ratings ranging from 16.5 to 20.0 SEER.

Extremely quiet

Ductless systems keep the operating noise of the condensing unit outdoors, while the blower fan of the indoor unit remains whisper quiet.

Zero duct loss

The DOE reports that ducted systems lose an average of 25-40% in performance due to leaks, cracks or disconnections in ductwork. No ductwork means zero duct loss.

No dirty air ducts

Ever wonder how much dirt and mold is in your ductwork? Now there's no need to clean dirty air ducts that can harbor dust, germs and allergens that are eventually blown into your home or office.



Zone 1

Zone 2 >



Zone 3 >



Zone cooling flexibility


Independently condition up to 4 separate rooms using only a single outdoor unit. Reduce energy use and save money by cooling and heating only the rooms that are in use.

Variable capacity advantages

Inverter Technology allows each system to adjust capacity and cooling output to provide only the amount of cooling needed at a given time. For example, an 18,000 BTU/h system will operate even more efficiently as a 15,500 if that is all that's needed.

Advanced inverter technology

As illustrated in the chart below, Inverter Technology lets you reach the desired temperature faster, maintain it more accurately, and reduce energy costs. It eliminates constant compressor start-ups/shut-downs that traditional technology requires to maintain the set temperature.

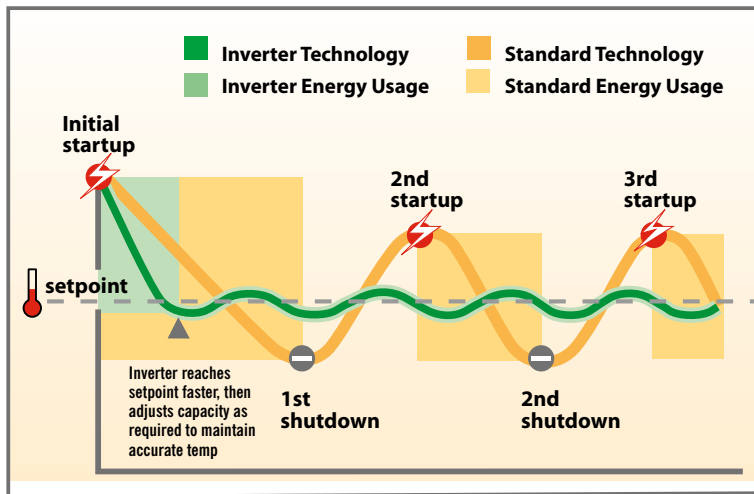

RESIDENTIAL APPLICATIONS

- Room additions/renovations
- Homes without ductwork
- Bedrooms and family rooms
- Garage workshops
- Sunrooms
- Guest quarters
- Wine cellars

COMMERCIAL APPLICATIONS

- Computer rooms/server rooms
- Restaurant kitchen and prep areas
- Offices in warehouse spaces
- Storage facilities
- Buildings where security concerns prevent the use of window units
- Internal areas without exterior wall access

Zone 4



Precise comfort from one system in up to four different rooms.

That's the beauty- and efficiency of a Multi-zone system.



Wall-mounted single zone

Wall-mounted multi-zone heat pump

One wall-mounted indoor unit connected to one outdoor unit.

Features

- Auto swing louvers (up/down)
- Continuous 'Air Sweep'
- Auto-restart after power interruptions
- Auto-shut flaps close when unit is off for a sleeker appearance
- Washable, reusable air filters
- Removable front grille
- Auto-changeover (heat pump models)

1



LCD wireless remote

- LCD remote for each indoor unit
- 24-hour timer and sleep timer
- Auto/cool/dry/fan/heat* modes
- Four fan speeds heating* or cooling: high/medium/low/quiet, plus auto-fan
- Secured remote control holder
- Four different transmitter codes to prevent unintentional interference with nearby units



* Heat pump models only

Pictured: Single zone model MW24CF indoor unit. Multi-zone system M36QYF. Appearance varies by model.

Two, three or four wall-mounted indoor units connected to one outdoor unit.

Features

- Auto swing louvers (up/down)
- Continuous 'Air Sweep'
- Auto-restart after power interruptions
- Auto-shut flaps close when unit is off
- Washable, reusable air filters
- Removable front grille
- Auto-changeover
- Low-ambient operation

2

3

4



Commercial applications including restaurant dining areas and kitchens

Fully featured and fully programmable for total convenience

Auto-shut flaps close when unit is off for a sleeker appearance.

The continuous 'Air Sweep' auto louvers gently distribute cool or warm air throughout the room.

Auto-changeover on heat pump models automatically switches the unit from cool to heat; or from heat to cool to maintain desired temperature.

R-410A



All models use environmentally friendly R-410A refrigerant.

= cooling capacity
= heating capacity

cool only

model	btu/h	seer
C M09CF	9700	14.3
C M12CF	12300	13.5
C M18CF	18000	19.0
C M24CF	24200	18.0
C M30CF	30700	15.0
C M36CF	33100	15.0

cool/ heat pump

model	btu/h	seer
C M09Y1G	8500 10000	20.0
M12YG	11500 14000	20.0
M18YF	18000 21600	19.0
M24YF	24200 27600	18.0

multi-zone cool/heat pump

model	zone 1 zone 2 zone 3 zone 4				total btu	seer
	btu/h					
C M18DYF	9500	9500	—	—	19000	16.5
H	11000	11000	—	—	22000	
C M21DYF	9500	12000	—	—	21500	16.5
H	11000	14000	—	—	25000	
C M24DYF	12000	12000	—	—	24000	16.5
H	14000	14000	—	—	28000	
C M27TYF	9200	9200	9200	—	27600	15.0
H	11200	11200	11200	—	33600	
C M30TYF	9300	9300	11800	—	30400	15.0
H	11000	11000	14000	—	36000	
C M33TYF	9400	11800	11800	—	33000	15.0
H	10700	13600	13600	—	37900	
M36TYF1	9100	9100	17000	—	35200	15.0
H	9800	9800	18400	—	38000	
M36TYF2	11700	11700	11700	—	35100	15.0
H	12700	12700	12700	—	38100	
M36QYF	8800	8800	8800	8800	35200	15.0
H	9500	9500	9500	9500	38000	

Floor/ceiling universal heat pump

Universal system may be located low against the wall or on the ceiling.

Features

- Auto swing louvers (up/down, left/right)
- Continuous 'Air Sweep'
- Auto-restart after power interruptions
- Auto-shut flaps close when unit is off for a sleeker appearance
- Auto-changeover
- Washable, reusable air filters
- Fresh air capability

LCD wireless remote

- 24-hour timer and sleep timer
- Auto/cool/dry/fan/heat modes
- Three fan speeds heating or cooling: high/medium/low, plus auto-fan
- Four different transmitter codes
- Secured remote control holder
- Self-diagnostics



cool/ heat pump


S24YF 22,200 BTU/h 15.0 SEER
 24,200 BTU/h



Ceiling cassette heat pump

Features

- Auto-swing louvers (up/down)
- Continuous 'Air Sweep'
- Auto-restart after power interruptions
- Auto-changeover
- Washable, reusable air filters
- Low-ambient operation
- Fresh air intake
- Two branch ducts for adjoining rooms (*requires additional fan*)
- Condensate pump: 31" lift
- Auto-shut flaps close when unit is off



low profile- 9 1/4" above ceiling

LCD wired remote

- Seven-day programmable on/off timer controls up to 16 units- individually or by zones
- Auto/cool/dry/fan/heat modes
- Self-diagnostics
- Three fan speeds heating or cooling: high/medium/low, plus auto-fan

cool/ heat pump

C24YF 22,200 BTU/h 15.0 SEER
 24,200 BTU/h

Ceiling suspended heat pump

Features

- Auto swing louvers (up/down, left/right)
- Continuous 'Air Sweep'
- Auto-restart after power interruptions
- Auto-shut flaps
- Washable, reusable air filters
- Fresh air capability
- Auto-changeover
- Low-ambient operation
- Optional DP-36 condensate pump



LCD wireless remote

- 24-hour timer and sleep timer
- Auto/cool/dry/fan/heat modes
- Three fan speeds heating or cooling: high/medium/low, plus auto-fan

- Four different transmitter codes
- Secured remote control holder
- Self-diagnostics

cool/ heat pump

S36YF 34,100 BTU/h 14.0 SEER
 38,200 BTU/h



Wall mounted cooling

Inverter model

PERFORMANCE RATINGS							
SYSTEM MODEL NO.		M09CF	M12CF	M18CF	M24CF	M30CF	M36CF
INDOOR MODEL		MW09C1F	MW12C1F	MW18C3F	MW24C3F	MW30C3F	MW36C3F
OUTDOOR MODEL		MR09C1F	MR12C1F	MR18C3F	MR24C3F	MR30C3F	MR36C3F
Capacity Cooling	BTU/h	9700	12300	18000	24200	30700	33100
Capacity Cooling Min - Max	BTU/h	9700	12300	5500-19000	5200-26000	9900-34200	9900-34100
Sensible Heat Ratio		0.67	0.65	0.63	0.76	0.67	0.67
SEER		14.3	13.5	19.0	18.0	15.0	15.0
EER		11.8	11.6	10.4	10.5	8.9	8.2
Moisture Removal	Pts/h	2.1	3.2	5.9	5.3	9.7	10.1
Airflow (Quiet, Low, Med, High)	CFM	185/220/260/295	215/250/305/355	240/290/355/415	380/450/560/650	380/450/560/650	365/440/530/700
Sound Rating - Indoor	dB-A	26/31/36/40	28/35/40/45	25/32/38/44	32/36/41/47	32/36/41/47	32/36/41/49
Sound Rating - Outdoor	dB-A	43	45	50	52	53	54
Operating Range	°F	0 - 115	0 - 115	0 - 115	0 - 115	0 - 115	0 - 115
ELECTRICAL DATA							
Power Source		115-60-1	115-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1
Min. Ampacity	A	12	15	16	21	22	22
Cooling Watts	W	820	1060	1730	2310	3460	4040
Max. TD Fuse/Breaker	A	15	20	20	30	30	30
REFRIGERATION SYSTEM							
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A
Compressor Type		Rotary	Rotary	Inverter	Inverter	Inverter	Inverter
Connections		Flare	Flare	Flare	Flare	Flare	Flare
Liquid Line O.D.	in	1/4	1/4	1/4	1/4	3/8	3/8
Suction Line O.D.	in	3/8	3/8	1/2	5/8	5/8	5/8
Factory Precharge	ft	25	25	49	49	66	66
Max. Line Length	ft	49	49	66	98	164	164
Max. Height Difference	ft	26	26	49	66	98	98
DIMENSIONS & WEIGHT							
INDOOR UNIT	W x H x D	in	31 1/8 x 10 7/8 x 8 1/2	31 1/8 x 10 7/8 x 8 1/2	31 1/8 x 10 7/8 x 8 1/2	39 1/4 x 12 5/8 x 9	39 1/4 x 12 5/8 x 9
	Net Weight	lbs	21	21	21	31	31
	Shipping Weight	lbs	26	26	26	40	40
OUTDOOR UNIT	W x H x D	in	31 1/8 x 21 1/4 x 11 3/8	31 1/8 x 21 1/4 x 11 3/8	31 1/8 x 22 3/4 x 12 3/8	31 1/8 x 22 3/4 x 12 3/8	35 3/8 x 32 5/8 x 13
	Net Weight	lbs	68	77	88	97	137
	Shipping Weight	lbs	77	86	98	106	155

Wall mounted heat pumps

PRELIMINARY

PERFORMANCE RATINGS							
SYSTEM MODEL NO.		M09YG	M12YG	M18YF	M24YF		
INDOOR MODEL		MW09Y3G	MW12Y3G	MW18Y3F	MW24Y3F		
OUTDOOR MODEL		MR09Y3G	MR12Y3G	MR18Y3F	MR24Y3F		
Capacity Cooling	BTU/h	8500	11500	18000	24200		
Cooling Capacity Min - Max	BTU/h	1700-10900	3100-13300	5500-19000	5200-26000		
Sensible Heat Ratio		0.71	0.71	0.63	0.76		
Capacity Heating @ 47°F	BTU/h	10000	14000	21600	27600		
Capacity Heating Min - Max	BTU/h	1700-15000	3100-19100	4600-29000	4100-36200		
Capacity Heating @ 17°F	BTU/h	8500	11000	16600	21000		
HSPF		10	10	10.0	10.0		
SEER		20	20	19.0	18.0		
EER		12.3	12.4	10.4	10.5		
Moisture Removal	Pts/h	2.9	3.7	5.9	5.3		
Airflow (Quiet, Low, Med, High)	CFM	185, 220, 260, 295	215, 250, 305, 355	240/290/355/415	380/450/560/650		
Sound Rating - Indoor	dB-A	22	22	25/32/38/44	32/36/41/47		
Sound Rating - Outdoor	dB-A	46	46	50	52		
Operating Range COOL (HEAT)	°F	0 - 115 (17-75)	0 - 115 (17-75)	0 - 115 (5-75)	0 - 115 (5-75)		
ELECTRICAL DATA							
Power Source		230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1		
Min. Ampacity	A	15	15	16	21		
Cooling Watts	W	820	1060	1730	2310		
Max. TD Fuse/Breaker	A	20	20	20	30		
REFRIGERATION SYSTEM							
Refrigerant		R410A	R410A	R410A	R410A		
Compressor Type		Inverter	Inverter	Inverter	Inverter		
Connections		Flare	Flare	Flare	Flare		
Liquid Line O.D.	in	1/4	1/4	1/4	1/4		
Suction Line O.D.	in	3/8	3/8	1/2	5/8		
Factory Precharge	ft	25	25	49	49		
Max. Line Length	ft	66	66	66	98		
Max. Height Difference	ft	49	49	49	66		
DIMENSIONS & WEIGHT							
INDOOR UNIT	W x H x D	in	31 1/8 x 10 1/4 x 7 5/8	31 1/8 x 10 1/4 x 7 5/8	31 1/8 x 10 7/8 x 8 1/2	39 1/4 x 12 5/8 x 9	
	Net Weight	lbs	16.5	16.5	21	31	
	Shipping Weight	lbs	21	21	26	40	
OUTDOOR UNIT	W x H x D	in	26 x 21 1/4 x 11 3/8	26 x 21 1/4 x 11 3/8	31 1/8 x 22 3/4 x 12 3/8	31 1/8 x 22 3/4 x 12 3/8	
	Net Weight	lbs	55	71	88	97	
	Shipping Weight	lbs	63	78	98	106	

Dual-zone heat pumps

i inverter model

Quad-zone heat pumps

PERFORMANCE RATINGS					
SYSTEM MODEL NO.	M18DYF i	M21DYF i		M24DYF i	M36QYF i
INDOOR MODEL	2 x MW09Y3FM	MW09Y3FM	MW12Y3FM	2 x MW12Y3FM	4 x MW09Y3FM
OUTDOOR MODEL	MR24DY3F	MR24DY3F		MR24DY3F	MR36TQY3F
Capacity Cooling	9500 ea.	9500 ea.	12000	12000 ea.	8800 ea.
Capacity Cooling Min - Max	5100-11300	5100-11300	5100-13600	5100-13600	5100-11300
Sensible Heat Ratio	0.77	0.77	0.77	0.77	0.71
Capacity Heating @ 47°F	11000 ea.	11000 ea.	14000	14000 ea.	9500 ea.
Capacity Heating Min - Max	5100-13000 ea.	5100-13000 ea.	5100-15400 ea.	5100-15400 ea.	5100-13000 ea.
Capacity Heating @ 17°F	9500 ea.	9500 ea.	11000	10500 ea.	6600 ea.
HSPF	9.0	9.0		9.0	9.0
SEER	16.5	16.5		16.5	15.0
EER	12.2	11.2		10.4	8.8
Moisture Removal	2.9 ea.	2.9 ea.	3.7 ea.	3.7 ea.	2.9 ea.
Airflow (Quiet, Low, Med, High)	185/220/260/295	185/220/260/295	215/250/305/355	215/250/305/355	185/220/260/295
Sound Rating - Indoor	27/29/33/37	27/29/33/37	30/34/39/42	30/34/39/42	27/29/33/37
Sound Rating - Outdoor	52	52		52	52
Operating Range COOL (HEAT)	°F 0 - 115 (14-75)	0 - 115 (14-75)		0 - 115 (14-75)	0 - 115 (14-75)
ELECTRICAL DATA (all indoor units receive power from outdoor unit; values listed are total)					
Power Source	230/208-60-1	230/208-60-1		230/208-60-1	230/208-60-1
Min. Ampacity	A 15	15		15	22.5
Cooling Watts	W 1600	1900		2300	3900
Max. TD Fuse/Breaker	A 20	20		20	30
REFRIGERATION SYSTEM					
Refrigerant	R410A	R410A		R410A	R410A
Compressor Type	Inverter	Inverter		Inverter	Inverter
Connections	Flare	Flare		Flare	Flare
Liquid Line O.D.	in 1/4	1/4	1/4	1/4	1/4
Suction Line O.D.	in 3/8	3/8	3/8	3/8	3/8
Factory Precharge	ft 98	98		98	165
Max. Line Length	ft Each unit:82 Total:98	Each unit:82 Total:98		Each unit:82 Total:98	Each unit:82 Total:230
Max. Height Difference	ft 33	33		33	49
DIMENSIONS & WEIGHT					
INDOOR UNIT	W x H x D	in 31 1/8 x 10 7/8 x 8 1/2 ea.	31 1/8 x 10 7/8 x 8 1/2 ea.		31 1/8 x 10 7/8 x 8 1/2 ea.
	Net Weight	lbs 21 ea.	21	21	21 ea.
	Shipping Weight	lbs 26 ea.	26	26	26 ea.
OUTDOOR UNIT	W x H x D	in 35 3/8 x 32 5/8 x 13	35 3/8 x 32 5/8 x 13		35 3/8 x 32 5/8 x 13
	Net Weight	lbs 151	151		151
	Shipping Weight	lbs 164	164		164

Tri-zone heat pumps

PERFORMANCE RATINGS										
SYSTEM MODEL NO.	M27TYF i	M30TYF i		M33TYF i		M36TYF1 i		M36TYF2 i		
INDOOR MODEL	3 x MW09Y3FM	2 x MW09Y3FM	MW12Y3FM	MW09Y3FM	2 x MW12Y3FM	2 x MW09Y3FM	MW18Y3FM	3 x MW12Y3FM		
OUTDOOR MODEL	MR36TQY3F	MR36TQY3F		MR36TQY3F		MR36TQY3F		MR36TQY3F		
Capacity Cooling	9200 ea.	9300 ea.	11800	9400	11800 ea.	9100 ea.	17000	11700 ea.		
Capacity Cooling Min - Max	5100-11300	5100-11300	5100-13600	5100-11300	5100-13600	5100-11300	5100-19000	5100-15400		
Sensible Heat Ratio	0.71	0.71	0.71	0.71	0.71	0.71	0.71	0.71		
Capacity Heating @ 47°F	11200 ea.	11000 ea.	14000	10700	13600 ea.	9800 ea.	18400	12700 ea.		
Capacity Heating Min - Max	5100-13000	5100-13000	5100-15400	5100-13000	5100-15400	5100-13000	5500-23000	5100-15400		
Capacity Heating @ 17°F	8300 ea.	7700 ea.	9800	7200	9200 ea.	6700 ea.	12500	8600 ea.		
HSPF	9.0	9.0		9.0		9.0		9.0		
SEER	15.0	15.0		15.0		15.0		15.0		
EER	10.0	9.2		8.8		8.8		8.8		
Moisture Removal	2.9 ea.	2.9 ea.	3.7	2.9	3.7 ea.	2.9 ea.	5.7	3.7 ea.		
Airflow (Quiet, Low, Med, High)	185/220/260/295	185/220/260/295	215/250/305/355	185/220/260/295	215/250/305/355	185/220/260/295	240/290/355/415	215/250/305/355		
Sound Rating - Indoor	27/29/33/37	27/29/33/37	30/34/39/42	27/29/33/37	30/34/39/42	27/29/33/37	33/39/42/46	30/34/39/42		
Sound Rating - Outdoor	52	52		52		52		52		
Operating Range COOL (HEAT)	°F 0 - 115 (14-75)	0 - 115 (14-75)		0 - 115 (14-75)		0 - 115 (14-75)		0 - 115 (14-75)		
ELECTRICAL DATA (all indoor units receive power from outdoor unit; values listed are total)										
Power Source	230/208-60-1	230/208-60-1		230/208-60-1		230/208-60-1		230/208-60-1		
Min. Ampacity	A 22.5	22.5		22.5		22.5		22.5		
Cooling Watts	W 2710	3180		3710		4000		3980		
Max. TD Fuse/Breaker	A 30	30		30		30		30		
REFRIGERATION SYSTEM										
Refrigerant	R410A	R410A		R410A		R410A		R410A		
Compressor Type	Inverter	Inverter		Inverter		Inverter		Inverter		
Connections	Flare	Flare		Flare		Flare		Flare		
Liquid Line O.D.	in 1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4		
Suction Line O.D.	in 3/8	3/8	3/8	3/8	3/8	3/8	1/2	3/8		
Factory Precharge	ft 165	165		165		165		165		
Max. Line Length	ft Each unit:82 Total:230	Each unit:82 Total:230		Each unit:82 Total:230		Each unit:82 Total:230		Each unit:82 Total:230		
Max. Height Difference	ft 49	49		49		49		49		
DIMENSIONS & WEIGHT										
OUTDOOR UNIT	W x H x D	in 31 1/8 x 10 7/8 x 8 1/2 ea.	31 1/8 x 10 7/8 x 8 1/2 ea.		31 1/8 x 10 7/8 x 8 1/2		31 1/8 x 10 7/8 x 8 1/2	31 1/8 x 10 7/8 x 8 1/2	31 1/8 x 10 7/8 x 8 1/2	
	Net Weight	lbs 21 ea.	21 ea.	21	21	21 ea.	21 ea.	21	21 ea.	
	Shipping Weight	lbs 26 ea.	26 ea.	26	26	26 ea.	26 ea.	26	26 ea.	
OUTDOOR UNIT	W x H x D	in 35 3/8 x 32 5/8 x 13	35 3/8 x 32 5/8 x 13		35 3/8 x 32 5/8 x 13		35 3/8 x 32 5/8 x 13		35 3/8 x 32 5/8 x 13	
	Net Weight	lbs 159	159		159		159		159	
	Shipping Weight	lbs 172	172		172		172		172	

Ceiling and Floor/ceiling universal heat pumps

inverter model

		floor/ceiling universal	ceiling suspended	ceiling cassette
PERFORMANCE RATINGS				
SYSTEM MODEL NO.		S24YF	S36YF	C24YF
INDOOR MODEL		MS24Y3F	MS36Y3F	MC24Y3F
OUTDOOR MODEL		MR24UY3F	MR36Y3F	MR24UY3F
Capacity Cooling	BTU/h	22200	34100	22200
Capacity Cooling Min - Max	BTU/h	5000-27300	8500-36000	5000-27300
Sensible Heat Ratio		0.62	0.67	0.64
Capacity Heating @ 47°F	BTU/h	24200	38200	24200
Capacity Heating Min - Max	BTU/h	5000-29000	9200-42700	5000-29000
Capacity Heating @ 17°F	BTU/h	20100	27100	20100
HSPF		8.5	8.5	8.5
SEER		15.0	14.0	15.0
EER		9.8	8.1	10.6
Moisture Removal	Pts/h	7.4	7.4	6.4
Airflow (Low, Med, High)	CFM	371/436/518	842/977/1089	436/536/618
Sound Rating - Indoor	dB-A	38/43/47	41/45/48	38/43/45
Sound Rating - Outdoor	dB-A	53	54	53
Operating Range COOL (HEAT)	°F	0 to 115 (14-75)	0 to 115 (14-75)	0 to 115 (14-75)
ELECTRICAL DATA				
Power Source		230/208-60-1	230/208-60-1	230/208-60-1
Min. Ampacity	A	15.5	23	15.5
Cooling Watts	W	2250	4220	2100
Max. TD Fuse/Breaker	A	20	30	20
REFRIGERATION SYSTEM				
Refrigerant		R410A	R410A	R410A
Compressor Type		Inverter (Twin Rotary)	Inverter (Twin Rotary)	Inverter (Twin Rotary)
Connections		Flare	Flare	Flare
Liquid Line O.D.	in	3/8	3/8	3/8
Suction Line O.D.	in	5/8	5/8	5/8
Factory Precharge	ft	50	50	50
Max. Line Length	ft	165	165	165
Max. Height Difference	ft	66	98	66
DIMENSIONS & WEIGHT				
INDOOR UNIT	W x H x D	in 39 x 7 7/8 x 25 3/4	65 3/8 x 9 1/2 x 27 1/2	32 5/8 x 9 5/8 x 32 5/8
	Net Weight	lbs 62	106	75
	Shipping Weight	lbs 82	134	97
OUTDOOR UNIT	W x H x D	in 35 3/8 x 32 5/8 x 13	35 3/8 x 32 5/8 x 13	35 3/8 x 32 5/8 x 13
	Net Weight	lbs 141	141	141
	Shipping Weight	lbs 154	154	154

Refrigeration line sets

USED WITH:	LENGTH-FT.	LIQUID	SUCTION	KIT#
All 9000 and 12000 BTU/h Indoor Units	15	1/4"	3/8"	T32150
	35	1/4"	3/8"	T32350
All 18000 BTU/h Indoor Units	15	1/4"	1/2"	T42150
	35	1/4"	1/2"	T42350
All MW24Y3F and MW24C3F Units	15	1/4"	5/8"	T52150
	35	1/4"	5/8"	T52350
All 30000 BTU/h Indoor Units and S24YF, S36YF and C24YF Units	15	3/8"	5/8"	T53150
	35	3/8"	5/8"	T53350

Insulated line sets are available for all split systems in 15 ft. and 35 ft. lengths. Each line set is equipped with flare nuts on both ends. Both liquid and suction lines are insulated. Line sets can be joined together with field supplied double female connectors. Each system requires one line set for each indoor unit installed. On multi-zone systems, line sets should be ordered based on individual indoor unit capacities not total system capacity. For example, a M18DYF uses 2 line sets for 9,000 btu units, not 1 for the 18,000 btu product.

DRAIN PUMP	USED WITH
DP-36	S36YF

NOTE: All models have low ambient capabilities built-in. Capacity is reduced as 0 degrees Fahrenheit is approached.

NOTE: All R410A models have 1/2" UNF 20 thread per inch charging and vacuuming ports. An adapter must be used for 1/4" gauges. Adapter part number 67270018 is available through parts distributors.

