


730 EEx-Double Flash Beacon

EEx-Double flash beacon in solid construction
2 separate flashing beacon systems
3 separate operation modes



TECHNICAL SPECIFICATIONS

Dimensions	260 mm x 325 mm
(Diameter x Height):	
Cap :	Reinforced borosilicate glass;
Housing :	Salt water-proof aluminum core,; outer housing high quality polyurethane;
Terminal :	Cable gland M 20 x 1,5;
Duty cycle:	5 x 10 Mio. flashes
Explosion protection:	II 2G EEx de IIC T4, PTB 01 ATEX 1054;
Protective wire casing:	Rust-proof steel, epoxy coated;
Operation modes:	1. Synchronized drive, 15 Ws every 1,5 s; 2. Alternating drive, 7,5 Ws every 0,75 s; 3. Double flash 200 ms, 15 Ws every 1,5 s;

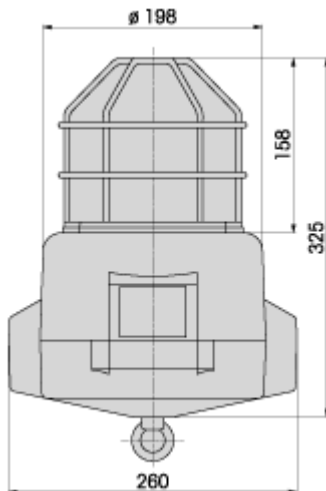

ORDER SPECIFICATIONS

Order-Nr.		Voltage	Rated Current
73010155	red	24 V =	700 mA
73030155	yellow	24 V =	700 mA
73010168	red	230 V ~	60 mA
73030168	yellow	230 V ~	60 mA