


Brazil - Non-Detachable Power Plug NBR 14136, 10A, 2 Poles

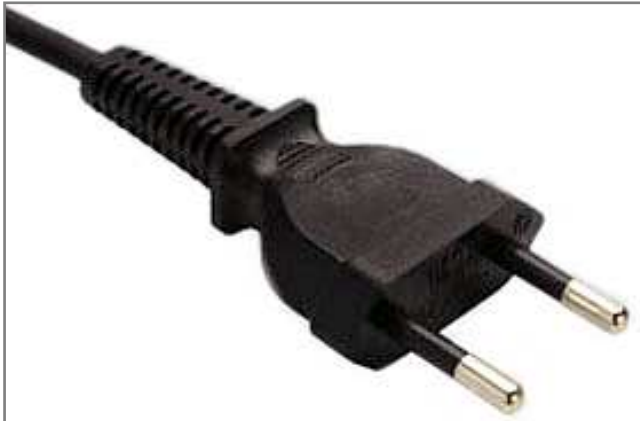


Catalog No. : YP-21C Plug

Standards : ABNT NBR NM 60884-1/2004,
NBR 14136/2002

Rated Current : 10A/250V~

Applications : For Class II Equipment

DIMENSIONS

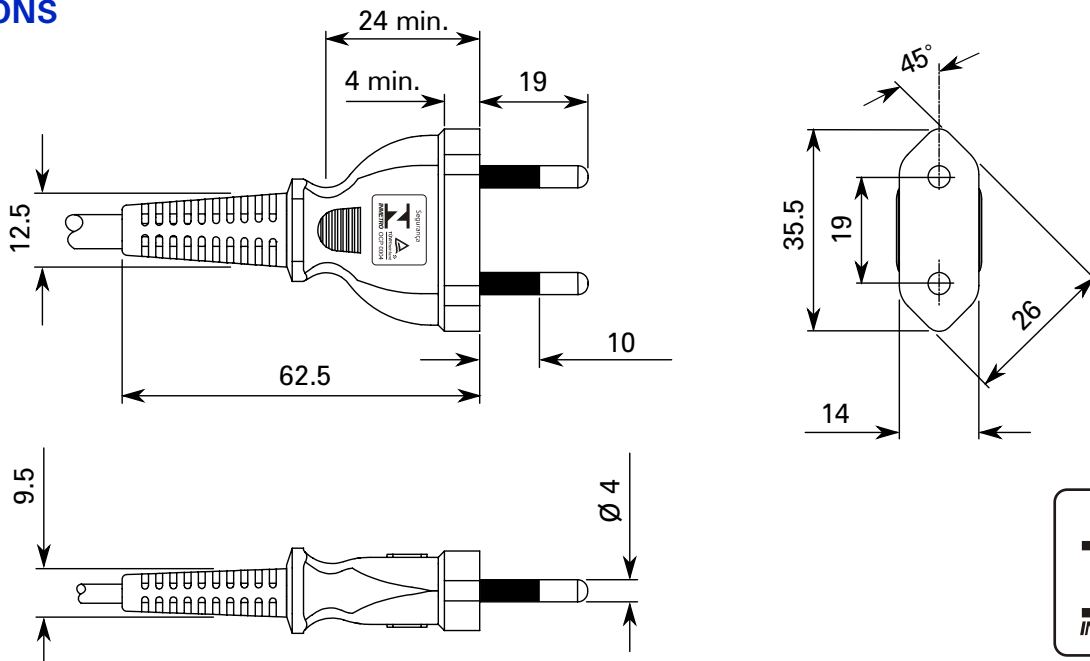

Excerpt from the product certification

Product: Non-Rewirable Plug Two-Poles without Earthing Contact for Class II Equipment 10A 250V~, Ref.: YP-21C

Standards: ABNT NBR NM 60884-1/2004, NBR 14136/2002 and Publication number 85 in April 03, 2006 from INMETRO.

Description of the product:

1) Classification of the plug:

- Non-rewirable, two-poles, without earthing contact, solid pins, provided with insulating sleeves, for class II equipment;
- Degree of protection: IP20;
- Type of terminals: crimped connections;
- Material of the cover: thermoplastic;
- Cable exit: 180°.

2) Standard Sheet:

- Conformity Evaluation Regulation annexed in INMETTRO Administrative Rule No. 085 of 04/03/2006 (Plug no. 02 of Annex C);
- NBR 14136/02 (figure 13).

3) The plug is in conformance with the standard ABNT NBR 60884-1/2004, if provided with the following cables:

Nominal Current	Type of Flexible Cable (in compliance with the Standard IEC 60227)	Cross-Section Area (mm ²)
10 Amp.	Flat, 300V, (H03VVH2-F) 227 IEC 52	2 x 0,75
	Round, 300V, (H03VV-F) 227 IEC 52	
	Flat, 500V, (H05VVH2-F) 227 IEC 53	2 x 1
	Round, 500V, (H05VV-F) 227 IEC 53	

Technical Data are Subject to Change without Notice. Dimensions in mm.