

## SAFE EX

- Attractive modern styling
- Easy and fast to install
- Competitive, value for money product
- Uniformly lit legend, compliant with EN1838
- Fresnel lens downlight panel
- EasiCheck™, Intellem and CeaGuard self-testing options

New Safe Ex is a popular choice for many installations. Offering excellent value for money, it can be quickly installed thanks to time saving features such as BESA piercings, keyhole screw fixings, clip out cable entry and a removable, hinged gear tray. The legend panel has been thoughtfully designed to slide in from below, permitting installation close to the ceiling or adjacent walls. The light source also provides excellent threshold lighting, thanks to a high quality fresnel lens downlight panel. New Safe Ex is now available with Intellem or EasiCheck™ self-test functionality, offering even greater choice for this ubiquitous exit sign.



## WHERE TO USE NEW SAFE EX

- Offices
- Corridors
- Boardrooms
- Receptions and foyers
- Hotels and pubs
- Restaurants
- Retail
- Universities, schools and colleges



**IP20**



### LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




### MATERIALS

- Body - steel, powder coated in RAL9010 finish, with polycarbonate end caps
- Gear tray - steel, powder coated in Permawhite finish
- Legend panel - acrylic
- Batteries (self-contained versions) - sealed nickel cadmium

### INSTALLATION NOTES

- Suitable for wall mounting
- BESA entry on rear, or direct screw fix via keyhole slots
- Additional top cable entry, with clip out grommet
- Removable gear tray clips into body, hinges and locates via locking tabs
- Legend panel (ordered separately) slides in from bottom
- Supplied complete with 1 x 8W lamp

### DIMENSIONS



### OPTIONS


- Maintained and non-maintained, 3 hour duration
- Intellem self test. Technology detailed on page 202
- EasiCheck™ addressable testing. System detailed on page 195
- Central system slave versions
- CeaGuard testing versions. See pages 418/424
- Choice of legend panels

### SPECIFICATION

Self contained - To specify state: BSI Kitemarked, back-lit self contained emergency sign, with hinged removable gear tray, fresnel downlight lens and slide in legend panel, fully compliant with EN1838, as Menvier New Safe Ex range, part no. \_\_\_\_\_

SelfTest/Slave - To specify state: Intelligent self-testing/Central system slave, back-lit emergency sign, with hinged removable gear tray, fresnel downlight lens and slide in legend panel, fully compliant with EN1838, as Menvier New Safe Ex range, part no. \_\_\_\_\_

### MAXIMUM VIEWING DISTANCE

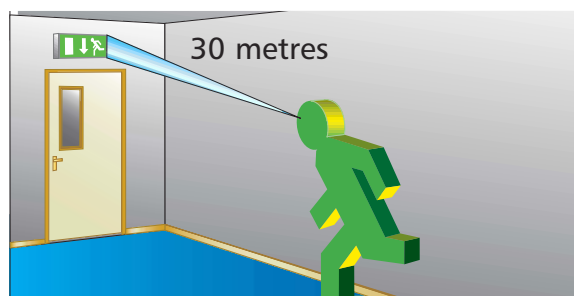

### CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)	Description	Pictogram	Cat. No.	Weight (kg)
<b>New Safe Ex luminaire - order legend panel separately</b>						
Non-maintained	SXN	2.30	Down arrow		PEXD	0.10
Maintained	SXM	2.70	Left arrow		PEXL	0.10
			Right arrow		PEXR	0.10
Intellem Infra-Red - Non-maintained	SXN/IR	2.30				
Intellem Infra-Red - Maintained	SXM/IR	2.70				
Intellem Self-Check - Non-maintained	SXN/IS	2.30				
Intellem Self-Check - Maintained	SXM/IS	2.70				
CeaGuard slave	SX230CG	2.10				
24V AC/DC Central system slave	SX24	2.10				
50V AC/DC Central system slave	SX50	2.10				
110V AC/DC Central system slave	SX110	2.10				
230V AC Static inverter system slave	SXS/8/230	2.10				

Also available with EasiCheck™ automatic testing functionality - see page 195 for system features  
Contact our Technical Support and Application department for further details -