


## Slimline Lamp SL 025 Series with On/Off switch

Photo: Slimline lamp with on/off switch, with integrated electric socket (Germany), Art. No. 02520.0-00

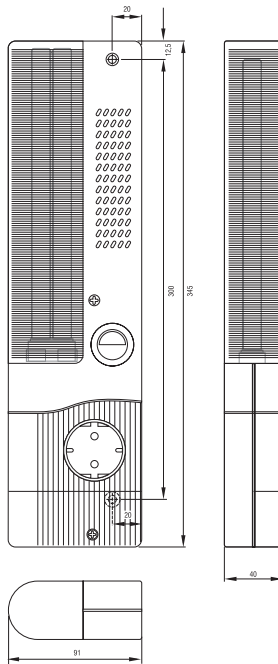

- Slim casing**
- Electronic ballast**
- Lamp without/with electrical socket (choice of sockets)**
- Magnet fixing (option)**
- Energy saving lamp**
- On/Off switch**


The flat slimline lamp SL 025 is suitable for all types of panels and enclosures, especially where space is at a premium. The lamp can be mounted on its narrow or broad surface using screws. It is also available with a magnet which allows it to be fitted quickly in any position in a steel enclosure. Both versions are available with an integrated electrical socket enabling the use of additional appliances.



### Technical Data

<b>Power consumption</b>	11W (equals 75W light bulb)
<b>Luminosity</b>	900Lm
<b>Lamp type</b>	energy saving lamp, 2G7 socket
<b>Service life</b>	10,000h
<b>Switch</b>	on/off switch for lamp
<b>Connection</b>	terminal 2.5mm <sup>2</sup> with cable clamp, clamping torque 0.8Nm
<b>Mounting</b>	screw fixing, M5, 300mm centers magnet fixing (optional)
<b>Casing</b>	plastic according to UL94 V-0, light grey
<b>Dimensions</b>	345 x 91 x 40mm
<b>Fitting position</b>	narrow surface/broad surface
<b>Operating/Storage temperature</b>	■022CF)
<b>Protection type</b>	IP20
<b>Note</b>	24VDC to 48VDC on request

The slimline lamp SL 025 is also available with a 19" front panel.



Art. No.	Model	Operating Voltage	Socket	Nominal Current	Weight (approx.)	Protection class	Approvals
02520.0-00	without magnet	230VAC, 50/60Hz	Germany (1)	16.0A	0.40kg	I (earthed)	VDE
02520.1-00	with magnet	230VAC, 50/60Hz	Germany (1)	16.0A	0.60kg	I (earthed)	VDE
02521.0-00	without magnet	230VAC, 50/60Hz	France/Poland (2)	16.0A	0.40kg	I (earthed)	VDE
02521.1-00	with magnet	230VAC, 50/60Hz	France/Poland (2)	16.0A	0.60kg	I (earthed)	VDE
02522.0-00	without magnet	230VAC, 50/60Hz	Switzerland (3)	10.0A	0.40kg	I (earthed)	VDE
02522.1-00	with magnet	230VAC, 50/60Hz	Switzerland (3)	10.0A	0.60kg	I (earthed)	VDE
02523.0-00	without magnet	230VAC, 50/60Hz	UK/Ireland (4)	13.0A	0.40kg	I (earthed)	VDE
02523.1-00	with magnet	230VAC, 50/60Hz	UK/Ireland (4)	13.0A	0.60kg	I (earthed)	VDE
02524.0-01	without magnet	120VAC, 50/60Hz	USA/Canada (5)	15.0A	0.40kg	I (earthed)	UL submitted
02524.1-01	with magnet	120VAC, 50/60Hz	USA/Canada (5)	15.0A	0.60kg	I (earthed)	UL submitted
02527.0-00	without magnet	230VAC, 50/60Hz	none	-	0.40kg	II (double insulated)	VDE; UL submitted
02527.1-00	with magnet	230VAC, 50/60Hz	none	-	0.60kg	II (double insulated)	VDE; UL submitted
02527.0-10	without magnet	120VAC, 50/60Hz	none	-	0.40kg	II (double insulated)	UL submitted
02527.1-10	with magnet	120VAC, 50/60Hz	none	-	0.60kg	II (double insulated)	UL submitted