

Metal Clad Range - Colour - Silver Grey Finish

General Features

- Tough durable finish which is resilient to premature aging and discolouration
- Metal Clad Range has steel plate finish with two coatings of tough paint finish
- Phosphate coat provides corrosion resistance
- Electro-statically applied grey powder finish cured at 200°C for toughness in an oven
- All power switches have Red markings on the switches
- Paint finish removed under each eyelet for better earth continuity
- All metal boxes have earth terminal of adequate size
- Each product is supplied with matching mounting box.
- All products made with white inserts

Note: While manufacturing inserts for metal clad range, all features of BS-EN specifications for moulded range has been retained.

13Amp Socket Outlets

- BS1363 pt2
- Supplied with M3.5 x 20mm long fixing screws
- 1G sockets supplied with 4 knockouts ■ 2G sockets supplied with 8 knockouts
- Terminal Capacity - 4 x 2.5mm² & 4 x 2.5mm² earth terminal
- Metal box with two fixed lugs ■ Kitemark Approved **licence no. KM73109**

Dimensions -	Type	HxWxD	Fixing Centre
	1G	79x79x42mm	60.3mm
	2G	79x138x42mm	120.6mm


Code	Description	Kitemark	Box/Outer
WMSK1	Unswitched Socket Single 13Amp	♥	10/100
WMSK2	Unswitched Socket Twin 13Amp	♥	5/50
WMSSK1	Switched Socket Single 13Amp	♥	10/100
WMSSK2	Switched Socket Twin 13Amp	♥	5/50
WMSSK1DP	Switched Socket Single 13Amp - DP c/w 2 Earth Terminals	♥	10/100
WMSSK2DP	Switched Socket Twin 13Amp - DP c/w 2 Earth Terminals	♥	5/50

Switches 10Amp AX Rating

- BS 3676 BSEN 60669
- AX-Rated - do not de-rate for Fluorescent or inductive load
- 1.2.3 Gang unit supplied with a two knockout on each side - two fixed lugs
- Knockout accepts 20mm - diameter conduit
- Supplied with M3.5 x 20mm long fixing screws
- Terminal Capacity - 3 x 1.5mm² & 3 x 1.5mm² earth terminal
- Kitemark Approved **licence no. KM73110**

Dimensions -	Type	HxWxD	Fixing Centre
	1,2,3G	79x79x42mm	60.3mm
	4G	79x138x42mm	120.6mm

Code	Description	Kitemark	Box/Outer
WMS11	Switch 1 Gang 1 Way	♥	10/100
WMS12	Switch 1 Gang 2 Way	♥	10/100
WMS22	Switch 2 Gang 2 Way	♥	10/100
WMS32	Switch 3 Gang 2 Way	♥	10/100
WMS42	Switch 4 Gang 2 Way	♥	5/50
WMS62	Switch 6 Gang 2 Way	-	5/50
WMSINT	Intermediate Switch	-	10/100

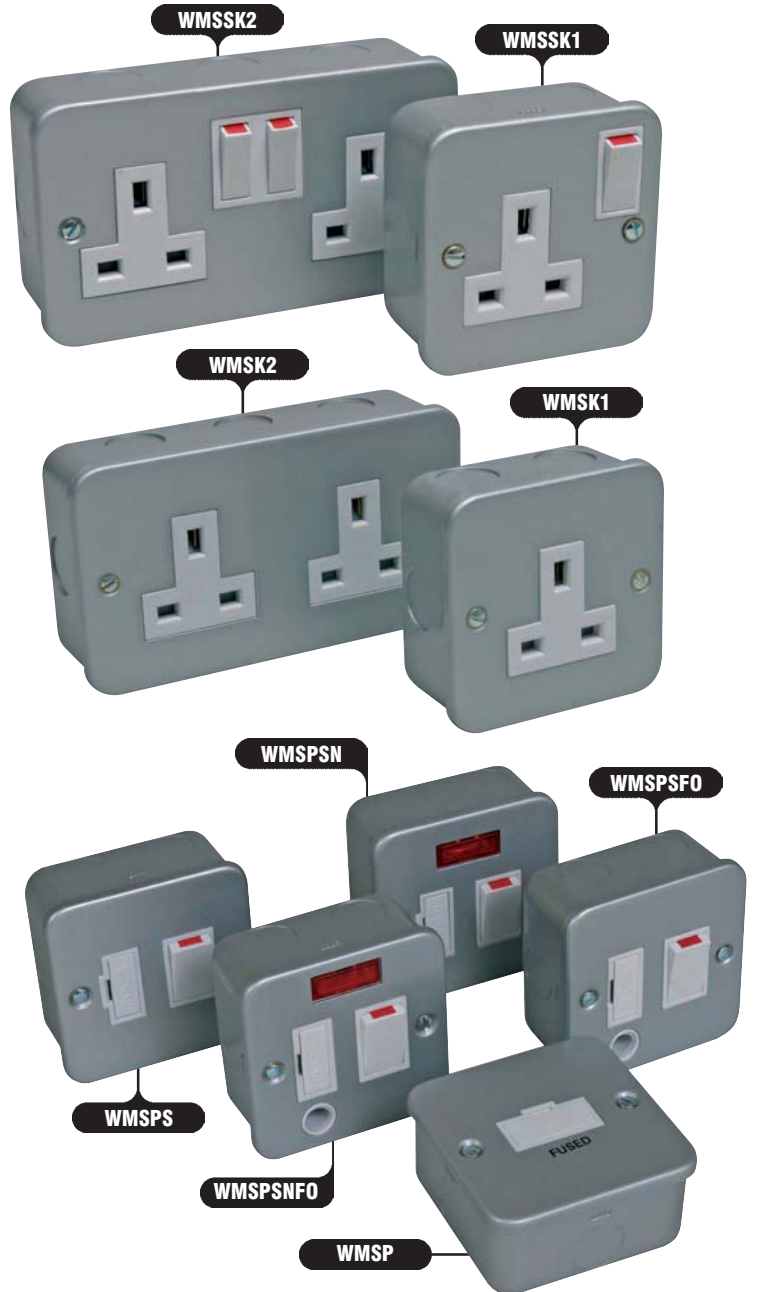

Fused Connection Units 13Amp

- BS1363 pt4 ■ Fused at 13Amp - BS1362 fuse
- Supplied with M3.5x20mm long fixing screw
- Terminal capacity 3x2.5mm² & 4 x 2.5mm² for earth terminal
- Cable clamp accepts 2.5mm² cable ■ Metal box with 2 fixed lugs
- Kitemark Approved **licence no. KM73109**

Dimensions -	Type	HxWxD	Fixing Centre
	1G	79x79x42mm	60.3mm

Code	Description	Kitemark	Box/Outer
WMSP	Fused Spur 13Amp	♥	10/100
WMSPS	Fused Spur Switched 13Amp	♥	10/100
WMSPSN	Fused Spur 13Amp + Neon	♥	10/100
WMSPSFO	Switched Spur 13Amp with Flex Outlet	♥	10/100
WMSPSNFO	Switched Spur 13Amp + Neon with Flex Outlet	♥	10/100

