

Brazil - Rewireable Cord Connectors, NBR 14136, 10A & 20A

Rewireable Cord Connectors,
2 Pole 3 Wire Grounding, 10A and 20A

Wiederanschliessbare Kupplungen, 10A & 20A



SPECIFICATIONS

- Ratings: 10 and 20 Amp, 250 Volts AC
- 2 Pole 3 Wire Grounding
- Connectors according to INMETRO NBR 14136/2002
- Screw-Type Terminals
- Thermoplastic, Brass Contacts
- Standard Colors*: Light Gray, Black




Catalog No.	Rating	for Pin Ø	Color*	Description	Weight/each	VPE/Pack	EDP No.
1727-LG	10A	4.0 mm	Light Gray	Cord Connector, 2P + E, 250V AC	33 g net.	850/50	125868
2146-BK	10A	4.0 mm	Black	Cord Connector, 2P + E, 250V AC	33 g net.	850/50	125893
1728-LG	20A	4.8 mm	Light Gray	Cord Connector, 2P + E, 250V AC	35 g net.	750/25	125834
2147-BK	20A	4.8 mm	Black	Cord Connector, 2P + E, 250V AC	35 g net.	750/25	125835

NOTES: * Available Colors: Tropical Green, Yellow, White, Pastel Blue, Black, Red, Light Gray, Blue. Non-Standard Colors are available on Special Order only, depending on quantities.

Join Standard Cordage only, Cross Section 0.75 to 1.5 mm² (2P + E) max. 10A/250V AC on the 10 Amp. Version, and Cross Section 1.5 to 2.5 mm² (2P + E) max. 20A/250V AC on the 20 Amp. Version. Connections specified by the appliance or product. **Warning:** The load can not exceed the specifications written in the products. Use Only Products with **Inmetro Safety Mark** of conformity of certified products.

*For using the „Safety Clip“ feature, these connectors needs to connect with straight plugs:
10A: Catalog No. 1729-LG and 2142-BK, 20A: Catalog No. 1730-LG and 2143-BK*

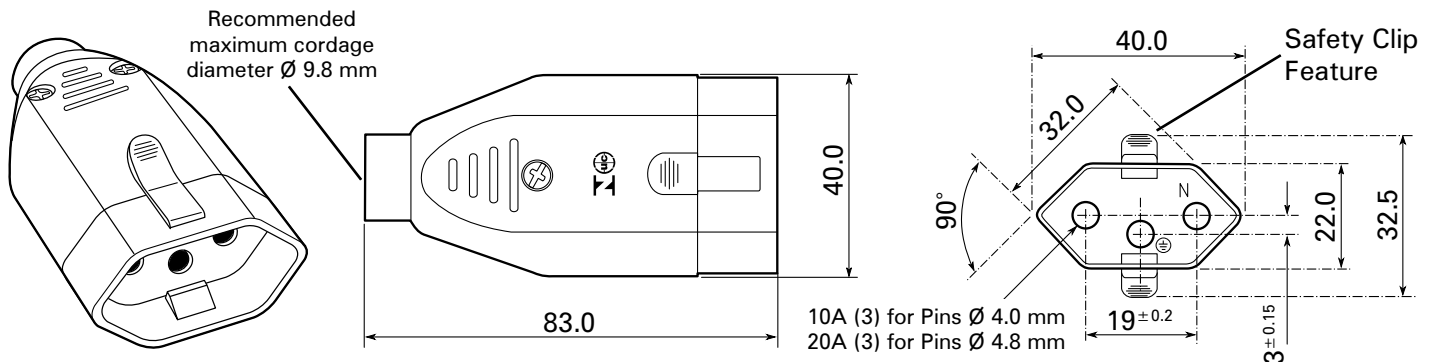

Technical Data are Subject to Change without Notice. Dimensions in mm.