


### LINE CORDS

### SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

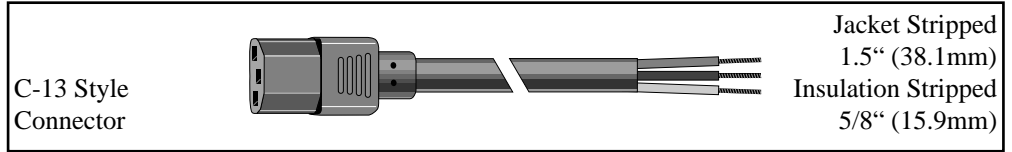

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

#### UNSHIELDED - STRAIGHT PLUGS

Part Number	Length		AWG	Conductor		Diameter		Power Watts	Rating Amps	Cord Type	
	Ft.-in.	m		mm <sup>2</sup>	Strand	In.	mm				
523	7-6	2.3	18	0.82	41/34	41x0.16	0.25	6.4	1250	10	SVT
511	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
512	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
513	6-7	2	16	1.31	65/34	65x0.16	0.35	8.9	1625	13	SJT
514	9-10	3	16	1.31	65/34	65x0.16	0.35	8.9	1625	13	SJT



#### SHIELDED - RIGHT ANGLE PLUG

Part Number	Length		AWG	Conductor		Diameter		Power Watts	Rating Amps	Cord Type	
	Ft.-in.	m		mm <sup>2</sup>	Strand	In.	mm				
521F	6-7	2	14	2.08	41/30	41x0.25	0.40	10.1	1825	15	SJT

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



#### AVAILABILITY


- 25 Piece Packages

### JUMPER CORDS & PARALLEL LAMP CORD SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT, SPT-1  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

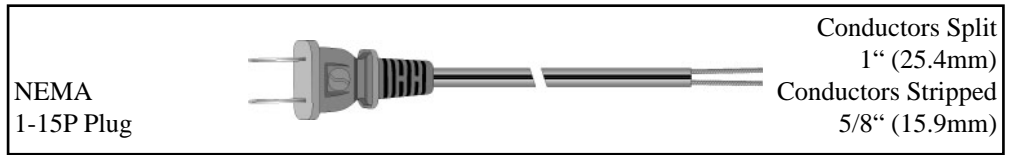

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:


- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black
- 601B Available with White or Slate Jacket Only

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

#### PARALLEL LAMP CORD

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
601B	6-0	1.8	18	0.82	41/34	41x0.16	0.11 x 0.22	2.8 x 5.6	1250	10	SPT-1

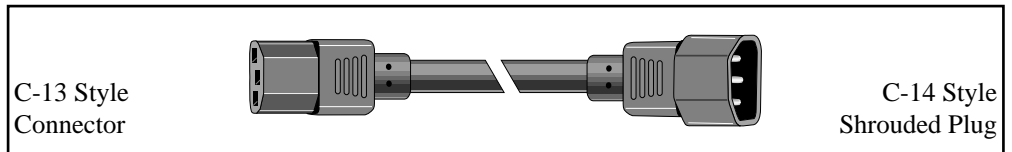

#### SHIELDED - ELECTRONIC JUMPER CORD

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
560F†	3-3	1	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT

#### UNSHIELDED - ELECTRONIC JUMPER CORDS

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
551†	3-3	1	18	0.82	41/34	41x0.16	0.33	8.4	1250	10	SJT
552†	3-3	1	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49
- † UL Recognized Wiring Harness



LISTED



Certified

Canadian Standards Association



Recognized Component

Underwriters Laboratories Inc.

#### AVAILABILITY

- 25 Piece Packages
- 601B In Stock, 100 Piece Packages

### POWER SUPPLY CORDS PVC, RUBBER AND NEOPRENE

TYPES SJ, SJT, SJO, SV, SVT  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Black, White, Green, or Green/Yellow
- Jacket Color: Black

\* Jacket Color: Gray

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC Rubber or Neoprene
- Jacket: PVC, Rubber or Neoprene

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED




Certified

Canadian Standards Association

#### AVAILABILITY

- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

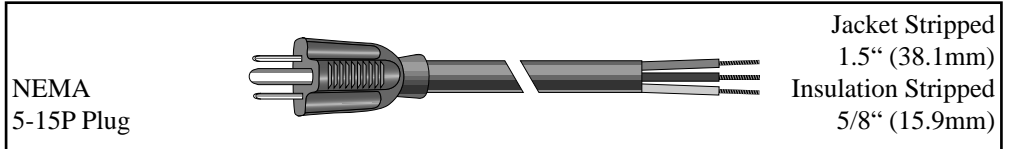

#### TYPE SJT PVC, SJ RUBBER and SJO NEOPRENE

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
615	6-0	1.8	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJ
780*	6-0	1.8	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJT
780B*	6-0	1.8	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJT
778	8-0	2.4	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJ
779*	8-0	2.4	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJT
779B*	8-0	2.4	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJT
781	8-0	2.4	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJO
616	9-0	2.7	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJ
782	12-0	3.7	18	0.81	16/30	16x0.25	0.33	8.4	1250	10	SJ

#### SJ RUBBER

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
783	9-0	2.7	16	1.31	26/30	26x0.25	0.35	8.9	1625	13	SJ
784	12-0	3.7	16	1.31	26/30	26x0.25	0.35	8.9	1625	13	SJ

#### TYPE SV RUBBER and SVT PVC


Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
775	6-0	1.8	18	0.824	41/34	41x0.16	0.26	6.6	1250	10	SV
776	8-0	2.4	18	0.824	41/34	41x0.16	0.26	6.6	1250	10	SV
777*	6-0	1.8	18	0.824	41/34	41x0.16	0.25	6.4	1250	10	SVT
777B*	6-0	1.8	18	0.824	41/34	41x0.16	0.25	6.4	1250	10	SVT
787*	8-0	2.4	18	0.824	41/34	41x0.16	0.25	6.4	1250	10	SVT
787B*	8-0	2.4	18	0.824	41/34	41x0.16	0.25	6.4	1250	10	SVT

### POWER SUPPLY CORDS PVC, RUBBER AND NEOPRENE

TYPES SJ, SJT, SVT  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

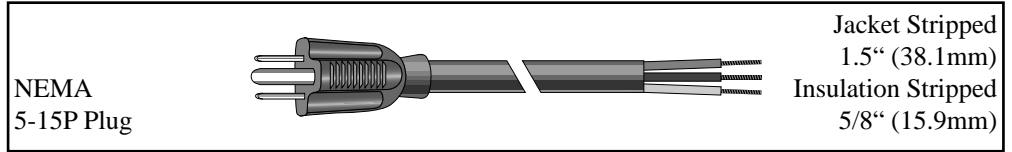

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)

\* Black, White, Green, or Green/Yellow

- Jacket Color: Black

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC or Rubber
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC or Rubber

#### SHIELDED - TYPE SVT PVC

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
507F	6-7	2	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT
508F	9-10	3	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT

#### UNSHIELDED - TYPE SJT PVC

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
501	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
501B	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
502	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
502B	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
503	6-7	2	16	1.31	65/34	65x0.16	0.35	8.9	1625	13	SJT
504	9-10	3	16	1.31	65/34	65x0.16	0.35	8.9	1625	13	SJT
505	6-7	2	14	2.08	41/30	41x0.25	0.38	9.6	1875	15	SJT
505B	6-7	2	14	2.08	41/30	41x0.25	0.38	9.6	1875	15	SJT
506	9-10	3	14	2.08	41/30	41x0.25	0.38	9.6	1875	15	SJT

#### UNSHIELDED - TYPE SJ RUBBER

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
788*	9-0	2.7	14	2.08	41/30	41x0.25	0.38	9.6	1875	15	SJ
789*	15-0	4.6	14	2.08	41/30	41x0.25	0.38	9.6	1875	15	SJ

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



#### AVAILABILITY

- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

### DETACHABLE POWER SUPPLY CORD SETS SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)
  - \* Color Code: Black, White, Green or Green/Yellow
  - Jacket Color: Black
- Part #543 also available in Gray

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Drain Wire
- Jacket: PVC

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED




Certified

Canadian Standards Association

#### AVAILABILITY


- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

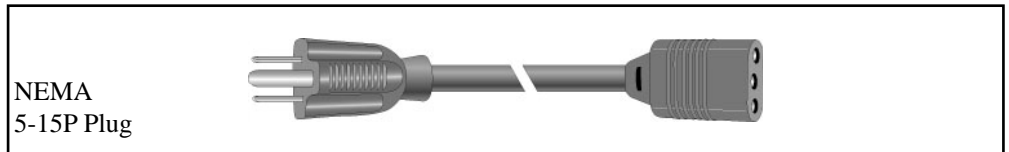

#### UNSHIELDED - STRAIGHT PLUGS

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
543*	7-6	2.3	18	0.82	41/34	41x0.16	0.25	6.4	875	7	SVT

Item 543 Also Has a Gray Jacket and Meets UL 817

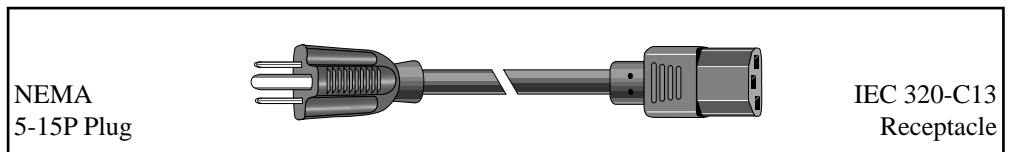

#### UNSHIELDED - STRAIGHT PLUGS

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
545*	7-6	2.3	18	0.82	41/34	41x0.16	0.25	6.4	1250	10	SVT
545B*	7-6	2.3	18	0.82	41/34	41x0.16	0.25	6.4	1250	10	SVT
546	7-6	2.3	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT

#### SHIELDED - STRAIGHT PLUGS

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
547F	6-7	2	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT
548F	9-10	3	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT
531F	6-7	2	18	0.82	41/34	41x0.16	0.34	8.6	1250	10	SJT
532F	9-10	3	18	0.82	41/34	41x0.16	0.34	8.6	1250	10	SJT
536F	9-10	3	14	2.08	41/30	41x0.25	0.40	10.1	1875	15	SJT

#### UNSHIELDED - STRAIGHT PLUGS


Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
531*	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
531B*	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
535*	7-7	2.3	18	0.82	41/34	41x0.16	0.25	6.4	1250	10	SVT
535B*	7-7	2.3	18	0.82	41/34	41x0.16	0.25	6.4	1250	10	SVT
532*	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
532B*	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
533	6-7	2	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT
534*	9-10	3	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT
534B*	9-10	3	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT

### DETACHABLE POWER SUPPLY CORD SETS SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT  
UL LISTED, CSA CERTIFIED

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

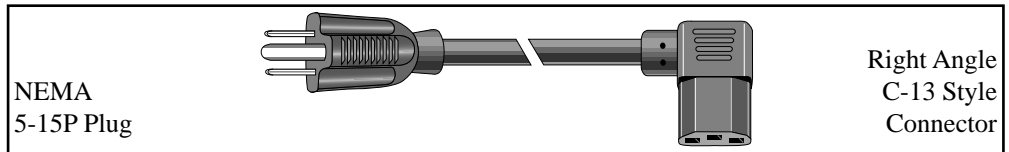

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

#### SHIELDED - RIGHT ANGLE PLUG

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
<b>550F</b>	9-10	3	18	0.82	41/34	41x0.16	0.27	6.8	1250	10	SVT

#### UNSHIELDED - RIGHT ANGLE PLUGS

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Cord Type
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm			
<b>537</b>	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
<b>537B</b>	6-7	2	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
<b>538</b>	9-10	3	18	0.82	41/34	41x0.16	0.33	8.3	1250	10	SJT
<b>540</b>	9-10	3	16	1.31	65/34	65x0.16	0.35	9.0	1625	13	SJT

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

#### AVAILABILITY


- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

### POWER SUPPLY CORD SETS MEDICAL GRADE

**TYPES SJT  
UL LISTED, CSA CERTIFIED**

#### MEDICAL GRADE CORD APPLICATIONS:

- In All Medical Environments Where Positive Ground is Critical to Reduce Shock and Sparks
- On X-Ray, Diagnostic and Operating Equipment
- On IV's, Blood Analyzers, Bedside Motors and Other Bio-Medical Equipment

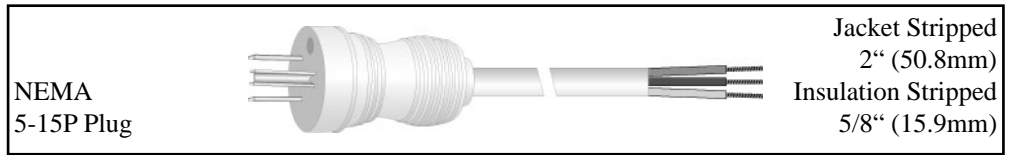

#### TYPE SJT PVC CORD

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Jacket Color	Plug Color	Conn. Color
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm					
801	10-0	3	18	1.20	43/34	43x0.16	0.31	7.8	1250	10	Black	Clear	---
802	10-0	3	18	1.20	43/34	43x0.16	0.31	7.8	1250	10	Gray	Gray	---

#### CHARACTERISTICS

##### Operating Temperature:

- -20°C to 60° C

##### Voltage Rating:


- 125 Volt

##### Color Description:

- Color Code: Black, White, Green
- Jacket Color: Black or Gray
- Plug Color: Black, Clear, Gray
- Connector Color: Black, Clear, Gray

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Jacket: PVC

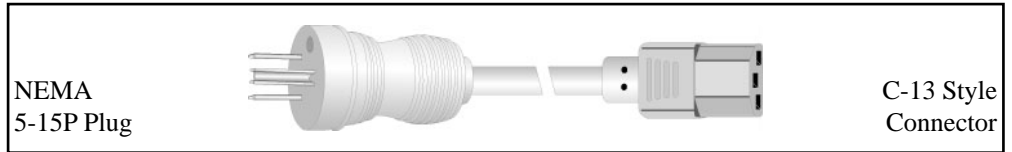

#### TYPE SJT PVC CORD SET

Part Number	Length		AWG	Conductor			Diameter		Power Watts	Rating Amps	Jacket Color	Plug Color	Conn. Color
	Ft.-in.	m		mm <sup>2</sup>	Strand	mm	In.	mm					
820	10-0	3	18	1.20	43/34	43x0.16	0.31	7.8	1250	10	Black	Clear	Black
821	10-0	3	18	1.20	43/34	43x0.16	0.31	7.8	1250	10	Gray	Gray	Gray
822	10-0	3	18	1.20	43/34	43x0.16	0.31	7.8	1250	10	Gray	Clear	Clear
830	10-0	3	16	1.50	68/34	68x0.16	0.33	8.5	1625	13	Black	Clear	Black
831	10-0	3	16	1.50	68/34	68x0.16	0.33	8.5	1625	13	Gray	Gray	Gray
832	10-0	3	16	1.50	68/34	68x0.16	0.33	8.5	1625	13	Gray	Clear	Clear

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- Passes UL VW-1 Flame Test
- CSA C22.2 No. 21
- CSA C22.2 No. 49
- Passes CSA FT2 Flame Test



#### AVAILABILITY

- 25 Piece Packages




### EXTENSION CORD SETS RUBBER

**TYPES SJ**  
**UL LISTED, CSA CERTIFIED**

#### CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

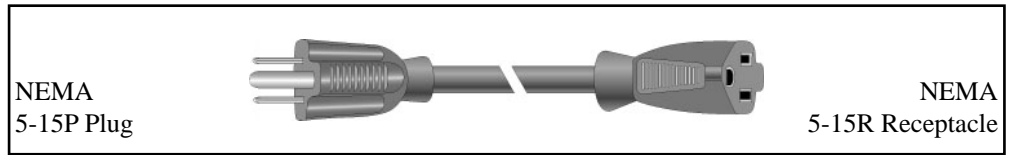

#### CHARACTERISTICS

##### Operating Temperature:

- 60° C

##### Voltage Rating:

- 125 Volt

##### Color Description:

- Color Code: Black, White, Green
- Jacket Color: Black

##### Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded Rubber
- Jacket: Rubber

#### TYPE SJ RUBBER

Part Number	Length		AWG	Conductor		Diameter		Power Watts	Rating Amps	Cord Type	
	Ft.-in.	m		mm <sup>2</sup>	Strand	In.	mm				
633	10-0	3.1	16	1.32	26/30	26x0.25	0.35	8.9	1625	13	SJ
640	15-0	4.6	16	1.32	26/30	26x0.25	0.35	8.9	1625	13	SJ

#### SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

#### AVAILABILITY

- Item 633 - 25 Piece Pack,
- Item 640 - Individually Bagged