

**UL TYPE CL2
UL AWM 2464
CSA CMG FT4
300 VOLT**

**COMMUNICATION & CONTROL
MULTIPAIR, FOIL/BRAID SHIELD, CAD/CAM CABLES
PVC/PVC**

APPLICATIONS

- Computer Interconnects
- EIA RS-232
- CAD/CAM Systems

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C – AWM
- -75°C – CL2

VOLTAGE RATING:


- 300 Volt – AWM
- 150 Volt – CL2

COLOR DESCRIPTION:

- Color Code: Chart A Page 374
- Jacket Color: Chrome Gray

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Semi-rigid PVC
- Shield: Aluminum/Polyester/Aluminum Plus Overall Braid of Tinned Copper (65% Coverage)
- Drain Wire: 28 AWG, 7/36 Tinned Copper
- Jacket: PVC

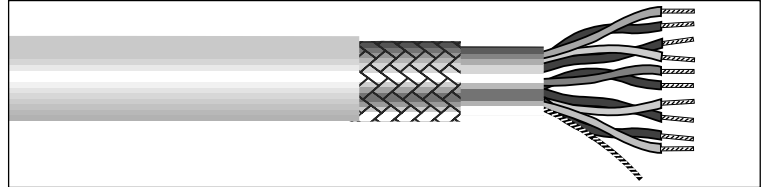

MULTIPAIR, FOIL/BRAID NEC TYPE CL2
28 AWG (0,089mm²), 7/36 (7x0,13mm), Insulation Thickness: 0.010" (0,25mm)

Part No.	No. of Pairs	Jacket Thickness		Diameter	
		Inches	mm	Inches	mm
▲ 3472C	2	0.035	0,89	0.21	5,3
▲ 3474C	4	0.035	0,89	0.25	6,3
▲▲ 3475C	5	0.035	0,89	0.26	6,6
▲ 3476C	6	0.035	0,89	0.27	6,8
▲ 3477C	7	0.035	0,89	0.27	6,8
3480C	10	0.035	0,89	0.33	8,3
3480/12C	12 ^{1/2}	0.035	0,89	0.34	8,6
3480/18C	18	0.035	0,89	0.38	9,7
3480/25C	25	0.035	0,89	0.45	11,5

SPECIFICATIONS

- UL Type CL2, AWM 2464
- CSA CMG FT4
- Passes UL Vertical Tray Flame Test

UL LISTED Passes UL VW-1 Flame Test Certified Certified
Underwriters Laboratories Inc. Canadian Standards Association

AVAILABILITY

- 100 ft (30,5m), 500 ft (152m), 1000 ft (305m) put-ups
- ▲ 1000 ft (305m) put-ups
- ▲▲ 100 ft (30,5m) and 1000 ft (305m) put-ups