

CORDS & ELECTRICAL

RETRACTILE COMMUNICATION CORDS

POLYPROPYLENE/PVC

UL 2464

**REDUCED
DIAMETERS!**

RETRACTILE CORD APPLICATIONS:

- Industrial Test Equipment
- Musical Instruments and Equipment
- Computer Keyboard Cable
- Mobile Communications
- Pick and Place Automation

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt
- 1 Amp

COLOR DESCRIPTION:

- Conductor Color: See Color Chart Below*
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Polypropylene (0.012" Insulation Thickness)
- Jacket: PVC


SPECIFICATIONS

- UL AWM Style 2464



AVAILABILITY

- 1 Piece Packages

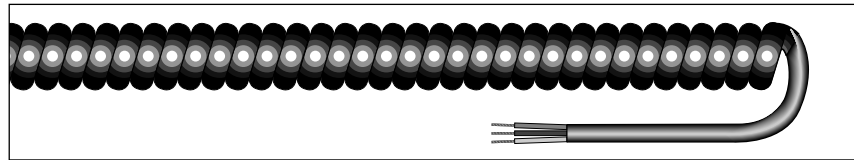

**RETRACTED LENGTH - 1 FT., EXTENDED LENGTH - 5 FT.
12 INCH LEADS AT EACH END - 23 AWG (0,27mm²), 21/36 (21x0,13mm)**

Part No.	No. of Cond.	Coil Diameter		Cord Diameter	
		Inches	mm	Inches	mm
702R	2	5/8	15,89	0.18	4,57
703R	3	11/16	17,46	0.19	4,83
704R	4	11/16	17,46	0.20	5,08
705R	5	3/4	19,10	0.22	5,59
706R	6	7/8	22,22	0.23	5,84
707R	7	7/8	22,22	0.23	5,84

**RETRACTED LENGTH - 2 FT., EXTENDED LENGTH - 10 FT.
6 INCH LEADS AT EACH END - 23 AWG (0,27mm²), 21/36 (21x0,13mm)**

Part No.	No. of Cond.	Coil Diameter		Cord Diameter	
		Inches	mm	Inches	mm
702/2R	2	5/8	15,89	0.18	4,57
703/2R	3	11/16	17,46	0.19	4,83
704/2R	4	11/16	17,46	0.20	5,08
705/2R	5	3/4	19,10	0.22	5,59
706/2R	6	7/8	22,22	0.23	5,84
707/2R	7	7/8	22,22	0.23	5,84

**RETRACTED LENGTH - 3 FT., EXTENDED LENGTH - 15 FT.
6 INCH LEADS AT EACH END - 23 AWG (0,27mm²), 21/36 (21x0,13mm)**

Part No.	No. of Cond.	Coil Diameter		Cord Diameter	
		Inches	mm	Inches	mm
704/3R	4	11/16	17,46	0.20	5,08
705/3R	5	3/4	19,10	0.22	5,59
706/3R	6	7/8	22,22	0.23	5,84
707/3R	7	7/8	22,22	0.23	5,84

**RETRACTED LENGTH - 4 FT., EXTENDED LENGTH - 20 FT.
6 INCH LEADS AT EACH END - 23 AWG (0,27mm²), 21/36 (21x0,13mm)**

Part No.	No. of Cond.	Coil Diameter		Cord Diameter	
		Inches	mm	Inches	mm
703/4R	3	11/16	17,46	0.19	4,83
704/4R	4	11/16	17,46	0.20	5,08
705/4R	5	3/4	19,10	0.22	5,59
706/4R	6	7/8	22,22	0.23	5,84
707/4R	7	7/8	22,22	0.23	5,84
708/4R	8	7/8	22,22	0.25	6,35
710/4R	10	15/16	23,81	0.28	7,11
712/4R	12	1	25,4	0.29	7,37
715/4R	15	1-1/16	26,56	0.31	7,87

*CONDUCTOR COLOR CHART			
COND. NO.	COLOR	COND. NO.	COLOR
1	Black	9	Gray
2	White	10	Pink
3	Red	11	Violet
4	Green	12	Tan
5	Orange	13	White/Black
6	Blue	14	Red/Black
7	Yellow	15	Green/Black
8	Brown		