




## Technical Specifications

### TradeMaster® & Specification Grade GFCI Receptacles with SafeLock™ Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

#### Typical Specifications

Description: Straight Blade Duplex GFCI Receptacle  
 Type: 2 Pole, 3 Wire Grounding  
 Rating: 20A, 125VAC Feed Thru, 15A, 125VAC or 20A, 125VAC FACE  
 3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 (15A). Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1, WD-6.

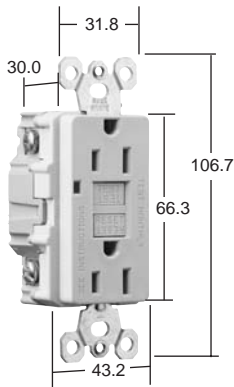

Dimensions for  
15 & 20 Amp

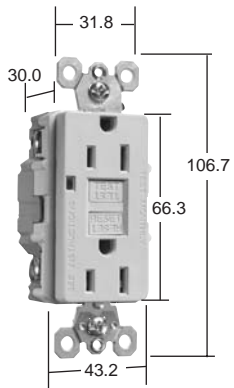

Dimensions for  
15 & 20 Amp  
With Auto-Ground



Catalog Number	Color	Rating	NEMA Configuration No.
<input type="checkbox"/> 1594-I	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1594-W	White	15A 125VAC	5-15R
<input type="checkbox"/> 1594	Brown	15A 125VAC	5-15R
<input type="checkbox"/> 1594-GRY	Gray	15A 125VAC	5-15R
<input type="checkbox"/> 1594-BK	Black	15A 125VAC	5-15R
<input type="checkbox"/> 1594-RED	Red	15A 125VAC	5-15R
<input type="checkbox"/> 1594-LA	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 1594-SI*	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1594-SW*	White	15A 125VAC	5-15R
<input type="checkbox"/> 1594-SLA*	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 2094-I	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2094-W	White	20A 125VAC	5-20R
<input type="checkbox"/> 2094	Brown	20A 125VAC	5-20R
<input type="checkbox"/> 2094-GRY	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 2094-BK	Black	20A 125VAC	5-20R
<input type="checkbox"/> 2094-RED	Red	20A 125VAC	5-20R
<input type="checkbox"/> 2094-LA	Light Almond	20A 125VAC	5-20R
<input type="checkbox"/> 2094-SI*	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2094-SW*	White	20A 125VAC	5-20R
<input type="checkbox"/> 2094-SLA*	Light Almond	20A 125VAC	5-20R

#### Performance

##### Electrical

Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC

##### Mechanical

Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device

##### Environmental

Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

#### Materials

Face	Nylon	Terminal Screws	Steel # 8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon
		Auto-Ground Clip*	Brass Alloy C260

\*GFCIs with Auto-Ground feature.

All devices listed on this page conform to NEMA WD-1.